



FIRE & SECURITY



POWER SUPPLIES

24 Volt, 3 Amp Single Indicator

PSS24V3A/SI/B


- 24 Volt, 3 Amp
- Reduces Power Consumption
- Resettable Fuses
- Saves Money
- Full Current to Load
- 260 x 320 x 100mm

Features include:

- Reverse Battery Protection
- Over Voltage Protection
- Over Current Protection
- AC 'On' Indicator



Order Codes explained

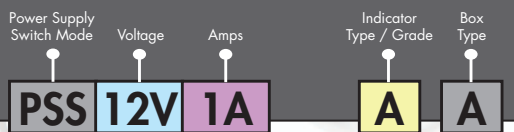

| | | | | | |
|-----------------------|-----------------------|--------------------------------|-----------------------|---------------------------------|------------|
| Rated Output | 3 Amp | Battery Fuse | Self Resetting | EPS Fault Relay and LED | No |
| Output Voltage (DC) | 27.4 V | Reverse Battery Protection | Yes | APS Fault Relay and LED | No |
| Output Fuse | Self Resetting | Deep Battery Protection | Yes | PSU Fault Relay and LED | No |
| Output Ripple | <100mV | Battery Low Voltage Monitoring | No | AC 'On' Indicator | Yes |
| Operating Temperature | -10°C to +44°C | Battery Load Test Monitoring | No | Standby Indicator | No |
| Battery Learn | No | Over Voltage Protection | Yes | 12V Output Fuse Fault Indicator | No |
| Battery Recharge Time | <72hrs | Over Current Protection | Yes | | |



FireBrand

2Y-LINK



CQR Fire & Security
125 Pasture Road, Moreton, Wirral, CH46 4TH, UK

Sales: 0151 606 1000 Tech: 0151 606 6311 www.cqr.co.uk

info@cqr.co.uk

