

02 Recessed Spots Fixed LED>The COB Dark Light IP44 Range

10112TP/W/W



12W COB LED recessed spot, IP44, for general application. Suitable for bathroom installation.

Requires 700mA constant current driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

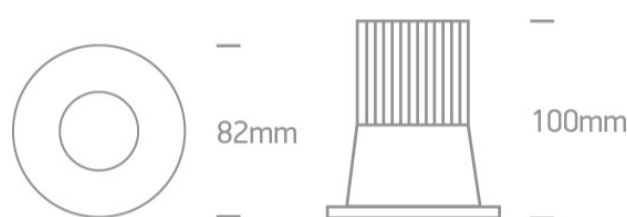

Gallery



Must be ordered separately



89015A

Related items




89015AT


Physical Specification

| | |
|----------------------|-------------------------------|
| Item Group | 02 Recessed Spots Fixed LED |
| Family | The COB Dark Light IP44 Range |
| Order Code | 10112TP/W/W |
| Colour | White |
| Material | Die Cast |
| Shape | Circular |
| Height | 100mm |
| Diameter | 82mm |
| Cutout Hole Diameter | 75mm |
| Recessed Ceiling | Yes |
| Depth Required | 110mm |
| Indoor | Yes |
| Adjustable | No |


Electrical Characteristics


| | |
|---------------|------------------|
| Fitting | |
| Input Type | Constant Current |
| Input Current | 700mA |
| Safety Class | III |
| Power(Watts) | 12W |
| IP Rating | IP44 |
| Light Source | LED built in |
| LED Type | COB |

| | |
|--------------|---|
| LED Brand | Epistar |
| Cable Length | 40cm |
| F Mark |  |

| |
|---|
| Epistar |
| 40cm |
|  |

Illumination Data

| | |
|----------------------|--|
| Colour Temperature | 3000K |
| Lumen Output | 1100lm |
| Light Efficiency | 91,67lm/W |
| CRI | 80 |
| Beam Angle | 38° |
| Illumination Diagram |  |
| Dark Light | Yes |


| |
|--|
| 3000K |
| 1100lm |
| 91,67lm/W |
| 80 |
| 38° |
|  |
| Yes |

Packing Info

| | |
|------------|---------------|
| Box Length | 12cm |
| Box Width | 12cm |
| Box Height | 8,5cm |
| Box Weight | 0,317kg |
| Pcs/Carton | 50 |
| Barcode | 5291889046578 |
| HS Code | 9405409900 |

| |
|---------------|
| 12cm |
| 12cm |
| 8,5cm |
| 0,317kg |
| 50 |
| 5291889046578 |
| 9405409900 |

Energy Label

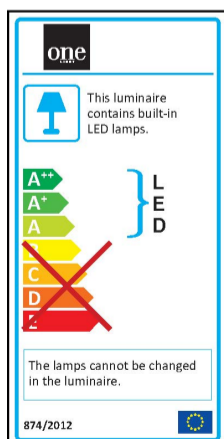

Warranty

2 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

