

02 Recessed Spots Fixed LED>The COB IP54 Range

10113P/AL/W



15W COB LED recessed spot, IP54, for general lighting applications.

Suitable for bathroom installation.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

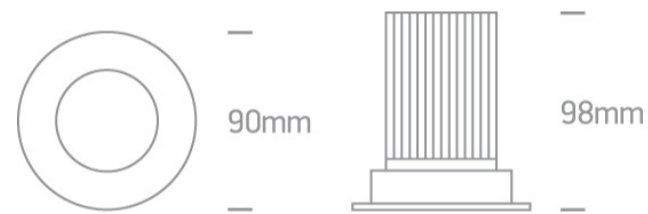

Gallery






Physical Specification



Item Group	02 Recessed Spots Fixed LED
Family	The COB IP54 Range
Order Code	10113P/AL/W
Colour	Aluminium
Material	Natural Aluminium
Shape	Circular
Height	98mm

Diameter	90mm
Cutout Hole Diameter	75mm
Recessed Ceiling	Yes
Depth Required	120mm
Indoor	Yes
Adjustable	No


Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	15W
IP Rating	IP54
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	700mA
Voltage	20,4V
Safety Class	
Power(Watts)	14W
IP Rating	IP54
Light Source	LED built in
LED Type	COB
LED Brand	Bridgelux

LED Number	1
F Mark	
Gear	
Gear Type	Led Driver
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	10-19,5W
Power Factor	0,9
Constant Current	Yes
700mA	17-28V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Brand	Eaglerise
Protection	0

Illumination Data


Colour Temperature	3000K
Lumen Output	1000lm
Light Efficiency	66,67lm/W
CRI	80
Beam Angle	50°
Illumination Diagram	

Packing Info

Box Length	16cm
Box Width	13,5cm

Box Height	9,5cm
Box Weight	0,294kg
Pcs/Carton	30
Barcode	5291889032687
HS Code	9405409900

Energy Label

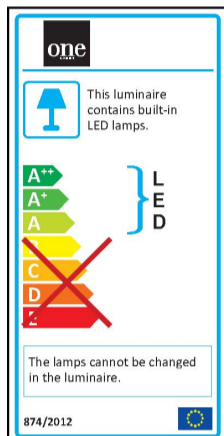

Certification & Warranty

Warranty

3 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

