



Product Datasheet

06 Downlights Fixed LED>The Budget Downlight Range

10115T/W/C



15W SMD LED recessed downlight, budget range, IP20.

Complete with 280mA driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads










Dimensions

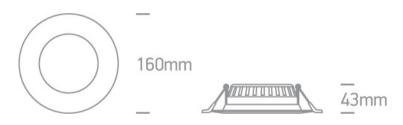

Gallery





Physical Specification


Item Group	06 Downlights Fixed LED
Family	The Budget Downlight Range
Order Code	10115T/W/C
Colour	White
Material	Aluminium
Shape	Circular
Height	43mm

Diameter	160mm
Cutout Hole Diameter	130mm
Recessed Ceiling	Yes
Depth Required	60mm
Indoor	Yes
Adjustable	No
lectrical Characteristics	
Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	15W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	280mA
Voltage	45V
Safety Class	₹III>
Power(Watts)	12,6W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Sanan

LED Number	30
F Mark	F
Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	11,7-17,7W
Power Factor	0,95
Constant Current	Yes
Output	280mA
Voltage Range	42-63V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Manufacturer	Kegu
Illumination Data	
Oalawa Taran a watuwa	40001/
Colour Temperature	4000K
Light Efficiency	1100lm
Light Efficiency	73,33lm/W
CRI	4000
Beam Angle	120°
Illumination Diagram	
Packing Info	
Box Length	17cm

Box Width	17cm
Box Height	6cm
Box Weight	0,290kg
Pcs/Carton	30
Barcode	5291889045793
HS Code	9405409900

Energy Label



Certification & Warranty

Warranty	2 Years
Weee Directive	Yes

switch to one light!

