

NH150 LED

Low Energy LED Flood Light

Please read these instructions carefully prior to installation and retain them for future reference.


IMPORTANT:

MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN.

LED LAMPS ARE EXTREMELY BRIGHT. UNDER NO CIRCUMSTANCES SHOULD YOU LOOK DIRECTLY INTO AN LED BEAM. DOING SO MAY CAUSE IRREPARABLE DAMAGE TO THE EYE

INSTALLATION / WIRING

- Remove the back plate bracket by undoing the securing screw on the bottom of the back plate.
- Choose the desired installation location and mark the fixing points through the back plate bracket. Pre drill the holes taking care not to damage any hidden pipes or cables.
- Pass the incoming cable in through the angled hole and grommet within the back plate.
- Fix the back plate bracket to the surface using suitable fixings / plugs for the surface.
- Wiring to be completed as Fig.1

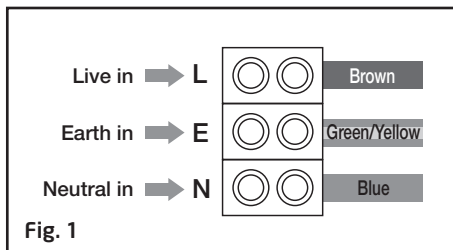

IMPORTANT NOTE This product must be Earthed

SPECIFICATIONS

Power source	220 - 240VAC/50Hz
Power consumption	12.1w (operational)
Light output	1100 lumens
Colour	5600K cool white
LED usage life	50,000 hours (65 years @ 2 hours/day)
Weatherproof	Suitable for external use

LED LAMPS ARE NON REPLACEABLE

Do not attempt to access / maintain the LED's. They are non replaceable and any contact may damage the LED's.



Ideal for use with NightHawk LED, AlertCam and GuardCam RF security lighting systems.

Elite Security Products

Unit 7, Target Park, Shawbank Rd
Lakeside, Redditch B98 8YN



Telephone: 01527 515150
email: info@espuk.com