

06 Downlights Fixed LED>The COB Downlight Range Aluminium

10130C/G/C



30W COB LED recessed downlight, IP20.

Complete with 850mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

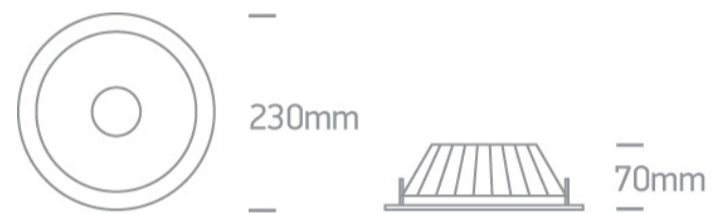

Physical Specification

Product Type	Gear
Item Group	06 Downlights Fixed LED
Family	The COB Downlight Range Aluminium
Order Code	10130C/G/C
Colour	Grey
Material	Aluminium
Shape	Circular
Height	70mm
Diameter	230mm
Cutout Hole Diameter	210mm
Recessed Ceiling	Yes
Depth Required	120mm

Indoor

Yes

Adjustable

No

Electrical Characteristics

Gear

External-Included

Fitting + Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

30W

IP Rating

IP20

Light Source

LED built in

Dimmable

No

F Mark



Fitting

Input Type

Constant Current

Input Current

850mA

Voltage

33V

Safety Class



Power(Watts)

28W

IP Rating

IP20

Light Source

LED built in

LED Type

COB

LED Brand

Epistar

F Mark




Gear

Gear Type

Led Driver


Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	20,4-41,6W
Power Factor	0,9
Constant Current	Yes
850mA	24-49V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable

Illumination Data

Colour Temperature	4000K
Lumen Output	2200lm
Light Efficiency	73,33lm/W
CRI	80
Beam Angle	80°
Illumination Diagram	

Packing Info

Box Length	26cm
Box Width	26cm
Box Height	9,5cm
Box Weight	1,22kg
Pcs/Carton	9
Barcode	5291889040231
HS Code	9405409900

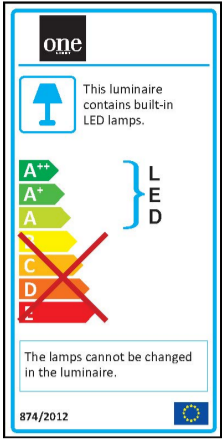

Certification & Warranty

Warranty

2 Years

Wee Directive

Yes

switch to
one light!

