

06 Downlights Fixed LED>Dark Light Pro Range

10130ED/W/B/W



30W COB LED recessed downlight, for general lighting applications.

Complete with 750mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

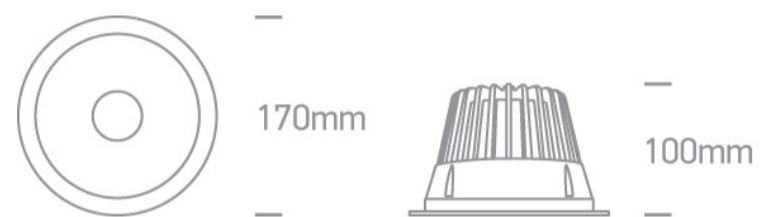

Physical Specification

| | |
|----------------------|-------------------------|
| Item Group | 06 Downlights Fixed LED |
| Family | Dark Light Pro Range |
| Order Code | 10130ED/W/B/W |
| Colour | White-Black |
| Material | Aluminium |
| Shape | Circular |
| Height | 100mm |
| Diameter | 170mm |
| Cutout Hole Diameter | 145mm |
| Recessed Ceiling | Yes |
| Depth Required | 130mm |
| Indoor | Yes |

Adjustable

No

Electrical Characteristics

Gear

External-Included

Fitting + Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

30W

IP Rating

IP20

Light Source

LED built in

Dimmable

No

F Mark



Fitting

Input Type

Constant Current

Input Current

750mA

Voltage

34,5V

Safety Class



Power(Watts)

29,3W

IP Rating

IP20

Light Source

LED built in

LED Type

SMD 2835

LED Brand

Sanan

LED Number

1


F Mark



Gear

Gear Type

Led Driver


| | |
|------------------|---|
| Input Voltage | 220-240V |
| 50 Hz | Yes |
| 60 Hz | Yes |
| Power(Watts) | 19-31,5W |
| Power Factor | 0,9 |
| Constant Current | Yes |
| 750mA | 25-42V |
| IP Rating | IP20 |
| Safety Class |  |
| Dimmable | No |
| Housing Material | Plastic |
| Output Terminal | Cable |
| Brand | LIFUD |

Illumination Data

| | |
|----------------------|---|
| Colour Temperature | 3000K |
| Lumen Output | 1800lm |
| Light Efficiency | 60lm/W |
| CRI | 80 |
| Beam Angle | 60° |
| Illumination Diagram |  |
| Dark Light | Yes |

Packing Info

| | |
|------------|---------------|
| Box Length | 17,5cm |
| Box Width | 12cm |
| Box Height | 18cm |
| Pcs/Carton | 20 |
| Barcode | 5291889058670 |
| HS Code | 9405409900 |

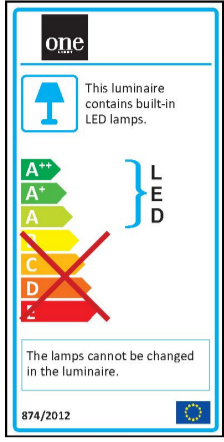

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes

switch to
one light!

