

New 2020 Edition 2>Downlights Fixed LED

## 10130U/W/C



30W SMD LED UGR19 downlight, IP44.

Complete with 750mA driver.


Complies with standard EN60598-1 and any other specific standards.



### Downloads



### Dimensions

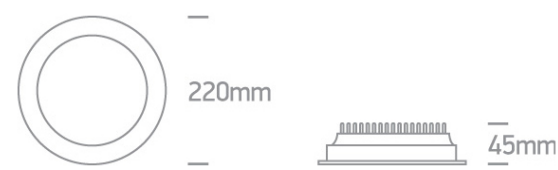

### Gallery






### Physical Specification

|            |                      |
|------------|----------------------|
| Item Group | New 2020 Edition 2   |
| Family     | Downlights Fixed LED |
| Order Code | 10130U/W/C           |
| Colour     | White                |
| Material   | Die Cast             |
| Shape      | Circular             |
| Height     | 45mm                 |

|                      |       |
|----------------------|-------|
| Diameter             | 220mm |
| Cutout Hole Diameter | 205mm |
| Recessed Ceiling     | Yes   |
| Depth Required       | 65mm  |
| Indoor               | Yes   |
| Adjustable           | No    |

## Electrical Characteristics

| Gear             | External-Included   |
|------------------|---|
| Fitting + Driver |   |
| Input Voltage    | 220-240V  |
| 50 Hz            | Yes   |
| 60 Hz            | Yes   |
| Safety Class     |  |
| Power(Watts)     | 30W   |
| IP Rating        | IP44  |
| Light Source     | LED built in  |
| Dimmable         | No  |
| F Mark           |  |

| Fitting       |   |
|---------------|---|
| Input Type    | Constant Current  |
| Input Current | 750mA   |
| Voltage       | 38V   |
| Safety Class  |  |
| Power(Watts)  | 28,5W   |
| IP Rating     | IP44  |
| Light Source  | LED built in  |
| LED Type      | SMD 2835  |
| LED Brand     | Epistar   |

## Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

19,75-30W

Power Factor

0,9

Constant Current

Yes

750mA

25-40V

IP Rating

IP44

Safety Class



Dimmable

No

Housing Material

Plastic

Output Terminal

Cable

Brand

Lifud

Protection

Short Circuit and Overload

## Illumination Data

Colour Temperature

4000K

Lumen Output

2250lm

Light Efficiency

75lm/W

CRI

80

Illumination Diagram



UGR

19

## Packing Info


Pcs/Carton

20

Barcode

5291889065371

Energy Label

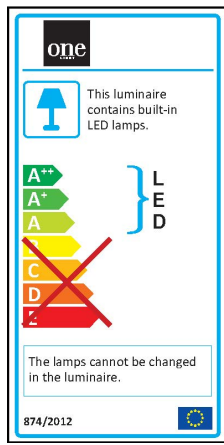

Certification & Warranty

Warranty

3 Years

Average Lifetime

30000hrs

Weee Directive

Yes

switch to  
**one light!**

