

04 Recessed Spots Adjustable LED>The COB Fire Rated

11106PF/W



6W LED Fire Rated Recessed adjustable spot, IP20.

Requires 350mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

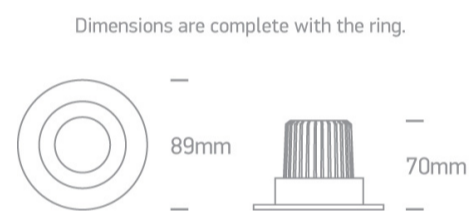

Gallery



Must be ordered separately




050044/B



050044/C



050044/MC

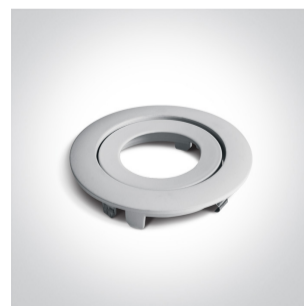

050044/W





89008

Physical Specification

| | |
|----------------------|----------------------------------|
| Item Group | 04 Recessed Spots Adjustable LED |
| Family | The COB Fire Rated |
| Order Code | 11106PF/W |
| Colour | White |
| Material | Die Cast |
| Shape | Circular |
| Height | 70mm |
| Diameter | 89mm |
| Cutout Hole Diameter | 75mm |
| Recessed Ceiling | Yes |
| Depth Required | 90mm |
| Indoor | Yes |
| Adjustable | 1 Direction |

Electrical Characteristics

Fitting

| | |
|---------------|---|
| Input Type | Constant Current |
| Input Current | 350mA |
| Safety Class |  |
| Power(Watts) | 6W |
| IP Rating | IP20 |
| Light Source | LED built in |
| LED Type | COB |
| LED Brand | Bridgelux |
| LED Number | 1 |
| Cable Length | 40cm |
| F Mark |  |


Illumination Data

| | |
|----------------------|---|
| Colour Temperature | 3000K |
| Lumen Output | 500lm |
| Light Efficiency | 83,33lm/W |
| CRI | 80 |
| Beam Angle | 40° |
| Illumination Diagram |  |

Packing Info

| | |
|------------|---------------|
| Box Length | 12cm |
| Box Width | 11cm |
| Box Height | 8,5cm |
| Box Weight | 0,322Kg |
| Pcs/Carton | 20 |
| Barcode | 5291889047162 |
| HS Code | 9405409900 |

Energy Label

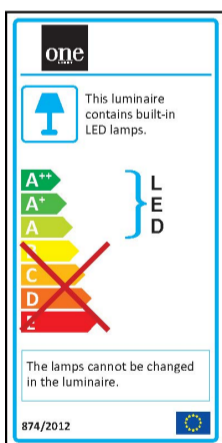

Warranty

3 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

