

04 Recessed Spots Adjustable LED>The 7W COB Range

11107B/W/W



7W recessed adjustable spot LED. Suitable for residential and commercial applications, IP20.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

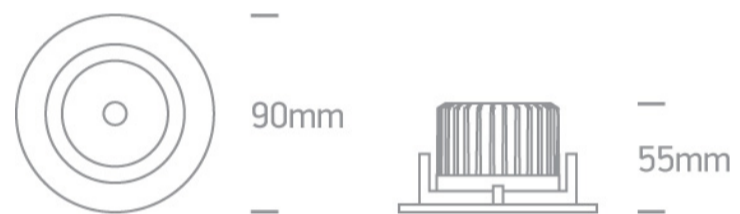

Gallery




Physical Specification



Item Group	04 Recessed Spots Adjustable LED
Family	The 7W COB Range
Order Code	11107B/W/W
Colour	White
Material	Die Cast
Shape	Circular
Height	55mm

Diameter	90mm
Cutout Hole Diameter	75mm
Recessed Ceiling	Yes
Depth Required	75mm
Indoor	Yes
Adjustable	1 Direction


Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	7W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	300mA
Voltage	21V
Safety Class	
Power(Watts)	6,3W
IP Rating	IP20
Light Source	LED built in
LED Type	COB
LED Brand	Epistar

LED Number	1
F Mark	
Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	4,2-7,2W
Power Factor	0,5
Constant Current	Yes
300mA	14-24V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Brand	Lifud
Protection	Short Circuit and Overload

Illumination Data


Colour Temperature	3000K
Lumen Output	560lm
Light Efficiency	80lm/W
CRI	80
Beam Angle	60°
Illumination Diagram	

Packing Info

Box Length	12,5cm
------------	--------

Box Width	6cm
Box Height	11,5cm
Box Weight	0,225Kg
Pcs/Carton	50
Barcode	5291889052142
HS Code	9405409900

Energy Label

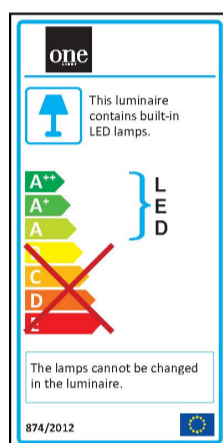

Certification & Warranty

Warranty	3 Years
Average Lifetime	30000hrs
Weee Directive	Yes

switch to
one light!

one
LIGHT

