

04 Recessed Spots Adjustable LED>The IP54 COB Outdoor/Bathroom Range

11107P/W/W



7W LED Recessed adjustable spot, ideal for bathroom and outdoor installation, IP54.

Requires 700mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

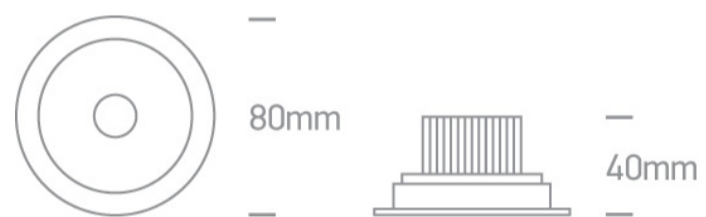

Gallery



Must be ordered separately



89015A

Related items



89015AT

Physical Specification

| | |
|----------------------|-------------------------------------|
| Item Group | 04 Recessed Spots Adjustable LED |
| Family | The IP54 COB Outdoor/Bathroom Range |
| Order Code | 11107P/W/W |
| Colour | White |
| Material | Die Cast |
| Shape | Circular |
| Height | 40mm |
| Diameter | 80mm |
| Cutout Hole Diameter | 70mm |
| Recessed Ceiling | Yes |
| Depth Required | 70mm |
| Indoor | Yes |
| Outdoor | Yes |
| Adjustable | 1 Direction |

Electrical Characteristics

| | |
|---------------|------------------|
| Fitting | |
| Input Type | Constant Current |
| Input Current | 700mA |
| Safety Class | III |
| Power(Watts) | 7W |
| IP Rating | IP54 |
| Light Source | LED built in |

| |
|--------------|
| LED Type |
| LED Brand |
| LED Number |
| Cable Length |
| F Mark |

| |
|---|
| COB |
| Cree |
| 1 |
| 40cm |
|  |

Illumination Data

| |
|----------------------|
| Colour Temperature |
| Lumen Output |
| Light Efficiency |
| CRI |
| Beam Angle |
| Illumination Diagram |


| |
|---|
| 3000K |
| 530lm |
| 75,71lm/W |
| 90 |
| 36° |
|  |

Packing Info

| |
|------------|
| Box Length |
| Box Width |
| Box Height |
| Box Weight |
| Pcs/Carton |
| Barcode |
| HS Code |

| |
|---------------|
| 8,5cm |
| 8,5cm |
| 6,5cm |
| 0,195Kg |
| 60 |
| 5291889045229 |
| 9405409900 |

Energy Label

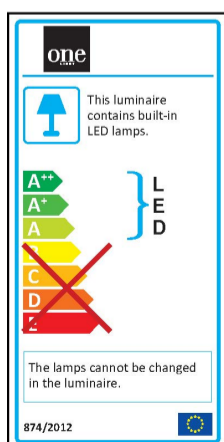

Warranty

3 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

