

04 Recessed Spots Adjustable LED>The COB Round Spots

## 11110A/W/C



COB LED recessed spot. Very elegant design with unique design of the reflector. Ideal for replacing halogen spots.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

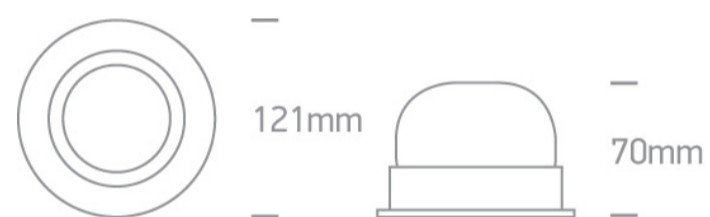

Physical Specification

|                      |                                  |
|----------------------|----------------------------------|
| Item Group           | 04 Recessed Spots Adjustable LED |
| Family               | The COB Round Spots              |
| Order Code           | 11110A/W/C                       |
| Colour               | White                            |
| Material             | Aluminium                        |
| Shape                | Circular                         |
| Height               | 70mm                             |
| Diameter             | 121mm                            |
| Cutout Hole Diameter | 100mm                            |
| Recessed Ceiling     | Yes                              |
| Depth Required       | 100mm                            |
| Indoor               | Yes                              |

Adjustable

1 Direction

Electrical Characteristics

Gear

External-Included

Fitting + Driver

Input Voltage

100-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

10W

IP Rating

IP20

Light Source

LED built in

Dimmable

No

F Mark



Fitting

Input Type

Constant Current

Input Current

250mA

Voltage

38V

Safety Class



Power(Watts)

9,5W

IP Rating

IP20

Light Source

LED built in

LED Brand

Citizen

LED Number

1

F Mark



Gear

Gear Type


Led Driver

Input Voltage

100-240V


|                  |   |
|------------------|---|
| 50 Hz            | Yes   |
| 60 Hz            | Yes   |
| Power(Watts)     | 7,5-10W   |
| Power Factor     | 0,9   |
| Constant Current | Yes   |
| 250mA            | 30-40V  |
| IP Rating        | IP20  |
| Safety Class     |  |
| Dimmable         | No  |
| Ambient Temp     | 45°C  |
| Operating Temp   | 85°C  |
| Housing Material | Plastic   |
| Output Terminal  | Cable   |

#### Illumination Data

|                      |   |
|----------------------|---|
| Colour Temperature   | 4000K   |
| Lumen Output         | 840lm   |
| Light Efficiency     | 84lm/W  |
| CRI                  | 80  |
| Beam Angle           | 36°   |
| Illumination Diagram |  |

#### Packing Info

|            |               |
|------------|---------------|
| Box Length | 15cm          |
| Box Width  | 14cm          |
| Box Height | 9,5cm         |
| Pcs/Carton | 20            |
| Barcode    | 5291889033325 |
| HS Code    | 9405409900    |

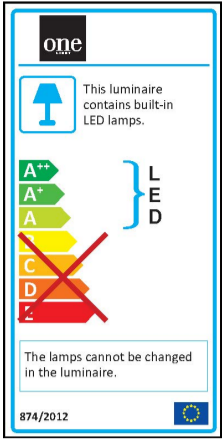

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes

switch to  
**one light!**

