

04 Recessed Spots Adjustable LED > Recessed COB Cylinders

## 11111C/W/W



11W COB LED recessed adjustable spot, for general lighting applications.

Supplied with Black & Brass reflectors.

Complete with 250mA driver.

Complies with standard EN60598-1 and any other specific standards.



### Downloads



### Dimensions



### Gallery






### Physical Specification



Item Group	04 Recessed Spots Adjustable LED
Family	Recessed COB Cylinders
Order Code	11111C/W/W
Colour	White
Material	Die Cast
Shape	Circular
Height	90mm

Diameter	90mm
Cutout Hole Diameter	85mm
Recessed Ceiling	Yes
Depth Required	110mm
Indoor	Yes
Adjustable	2 Directions


## Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	11W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	250mA
Voltage	37V
Safety Class	
Power(Watts)	9,25W
IP Rating	IP20
Light Source	LED built in
LED Type	COB
LED Brand	Luminus

LED Number	1
F Mark	
<b>Gear</b>	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	7,5-12W
Power Factor	0,5
Constant Current	Yes
250mA	30-48V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Brand	KEGU

### Illumination Data


Colour Temperature	3000K
Lumen Output	820lm
Light Efficiency	74,5lm/W
CRI	80
Beam Angle	38°
Illumination Diagram	
Dark Light	Yes

### Packing Info

Box Length	12cm
------------	------

Box Width	12cm
Box Height	9,5cm
Pcs/Carton	20
Barcode	5291889059455
HS Code	9405409900

## Energy Label

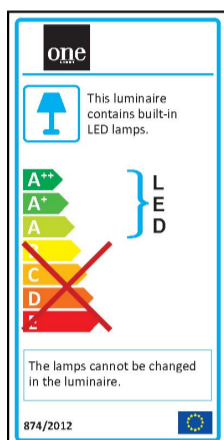

## Certification & Warranty

Warranty	3 Years
Weee Directive	Yes

switch to  
**one light!**

**one**  
LIGHT

