

04 Recessed Spots Adjustable LED>The 12W COB Range

11112/AL/W



12W COB LED Recessed Adjustable Spot.

Requires 700mA driver.


Complies with standard EN60598-1 and any other specific standards



Downloads



Dimensions

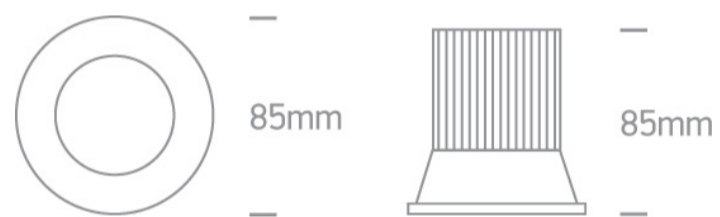

Gallery



Must be ordered separately



89015A



89015AT


Physical Specification

| | |
|----------------------|----------------------------------|
| Item Group | 04 Recessed Spots Adjustable LED |
| Family | The 12W COB Range |
| Order Code | 11112/AL/W |
| Colour | Aluminium |
| Material | Natural Aluminium |
| Shape | Circular |
| Height | 85mm |
| Diameter | 85mm |
| Cutout Hole Diameter | 78mm |
| Recessed Ceiling | Yes |
| Depth Required | 90mm |
| Indoor | Yes |
| Adjustable | 1 Direction |

Electrical Characteristics

| | |
|---------------|------------------|
| Fitting | |
| Input Type | Constant Current |
| Input Current | 700mA |
| Voltage | 14-16V |
| Safety Class | III |
| Power(Watts) | 12W |
| IP Rating | IP20 |
| Light Source | LED built in |

| |
|--------------|
| LED Type |
| LED Brand |
| LED Number |
| Cable Length |
| F Mark |

| |
|---|
| COB |
| Epistar |
| 1 |
| 40cm |
|  |

Illumination Data

| |
|----------------------|
| Colour Temperature |
| Lumen Output |
| Light Efficiency |
| CRI |
| Beam Angle |
| Illumination Diagram |


| |
|---|
| 3000K |
| 1100lm |
| 91,67lm/W |
| 80 |
| 38° |
|  |

Packing Info

| |
|------------|
| Box Length |
| Box Width |
| Box Height |
| Box Weight |
| Pcs/Carton |
| Barcode |
| HS Code |

| |
|---------------|
| 11cm |
| 9cm |
| 9cm |
| 0,304Kg |
| 50 |
| 5291889038962 |
| 9405409900 |

Energy Label

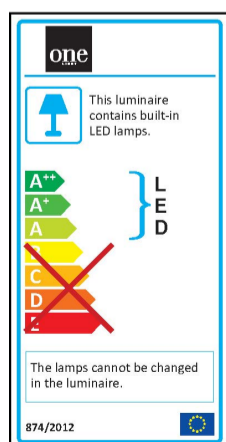

Warranty

2 Years

switch to
one light!

one
LIGHT

