

08 Downlights Adjustable LED>The COB Extractable Range

11112F/W/C



12W LED adjustable COB Extractable Range, IP20.

Requires 700mA driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions



Gallery



Must be ordered separately



89015A

Related items



89015AT


Physical Specification


Item Group	08 Downlights Adjustable LED
Family	The COB Extractable Range
Order Code	11112F/W/C
Colour	White
Material	Die Cast
Shape	Circular
Height	96mm
Diameter	113mm
Cutout Hole Diameter	102mm
Recessed Ceiling	Yes
Depth Required	120mm
Indoor	Yes
Adjustable	2 Directions

Electrical Characteristics


Fitting

Input Type	Constant Current
Input Current	700mA
Safety Class	III
Power(Watts)	12W
IP Rating	IP20
Light Source	LED built in
LED Type	COB

LED Brand	Epistar
Cable Length	40cm
F Mark	

Epistar
40cm


Illumination Data

Colour Temperature	4000K
Lumen Output	1100lm
Light Efficiency	91,67lm/W
CRI	80
Beam Angle	50°
Illumination Diagram	


4000K
1100lm
91,67lm/W
80
50°


Packing Info

Box Length	12cm
Box Width	12cm
Box Height	10cm
Box Weight	0,425Kg
Pcs/Carton	36
Barcode	5291889048589
HS Code	9405409900

12cm
12cm
10cm
0,425Kg
36
5291889048589
9405409900

Energy Label

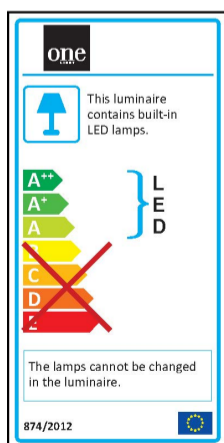

Warranty

3 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

