

Product Datasheet

08 Downlights Adjustable LED>Adjustable Multi LED

11112L/D/35




12W LED adjustable multiled downlight, IP20.

Requires 350mA driver.

Complies with standard EN60598-1 and any other specific standards.



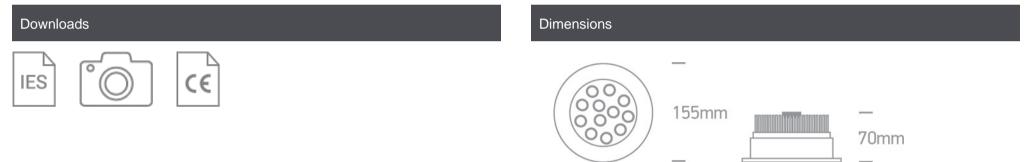

Gallery



Must be ordered separately



89015



Physical Specification

| Item Group | 08 Downlights Adjustable LED |
|----------------------|------------------------------|
| Family | Adjustable Multi LED |
| Order Code | 11112L/D/35 |
| Colour | Aluminium |
| Material | Natural Aluminium |
| Shape | Circular |
| Height | 70mm |
| Diameter | 155mm |
| Cutout Hole Diameter | 140mm |
| Recessed Ceiling | Yes |
| Depth Required | 80mm |
| Indoor | Yes |
| Adjustable | 1 Direction |

Electrical Characteristics

| Fitting | |
|---------------|------------------|
| Input Type | Constant Current |
| Input Current | 350mA |
| Safety Class | |
| Power(Watts) | 12W |
| IP Rating | IP20 |
| Light Source | LED built in |
| LED Number | 12 |
| Cable Length | 40cm |
| F Mark | F |
| | |

Illumination Data

Colour Temperature

6000K




| Lumen Output | 720lm |
|----------------------|--------|
| Light Efficiency | 60lm/W |
| Beam Angle | 35° |
| Illumination Diagram | |
| | |

Packing Info

| Pcs/Carton | 30 |
|------------|---------------|
| Barcode | 5291889020721 |
| HS Code | 9405409900 |

Energy Label



Certification & Warranty

| Warranty | 2 Years |
|----------------|---------|
| Weee Directive | Yes |

switch to one light!



