

08 Downlights Adjustable LED>The COB Pop Out Range Aluminium

11114R/W/C



14W LED adjustable COB Pop Out Range, IP20.

Requires 700mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

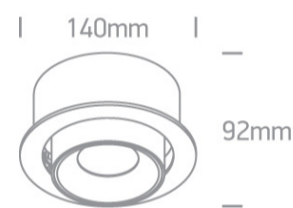

Gallery



Must be ordered separately



89015A

Related items




89015AT

Physical Specification


Item Group	08 Downlights Adjustable LED
Family	The COB Pop Out Range Aluminium
Order Code	11114R/W/C
Colour	White
Material	Aluminium
Shape	Circular
Height	92mm
Diameter	140mm
Cutout Hole Diameter	130mm
Recessed Ceiling	Yes
Depth Required	85mm
Indoor	Yes
Adjustable	2 Directions

Electrical Characteristics

Fitting	
Input Type	Constant Current
Input Current	700mA
Safety Class	III
Power(Watts)	14W
IP Rating	IP20
Light Source	LED built in
LED Type	COB

LED Brand	Bridgelux
Cable Length	40cm
F Mark	


Illumination Data

Colour Temperature	4000K
Lumen Output	1100lm
Light Efficiency	78,57lm/W
CRI	80
Beam Angle	36°
Illumination Diagram	

Packing Info

Box Length	20cm
Box Width	20cm
Box Height	15cm
Box Weight	1,15Kg
Pcs/Carton	12
Barcode	5291889046967
HS Code	9405409900

Energy Label

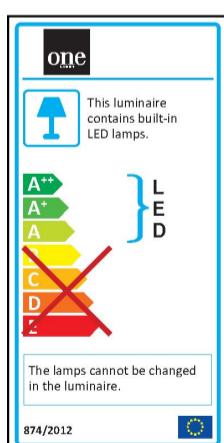

Warranty

3 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

