

08 Downlights Adjustable LED>The COB Pop Out Range Aluminium

11114R/W/W



14W LED adjustable COB Pop Out Range, IP20.

Requires 700mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

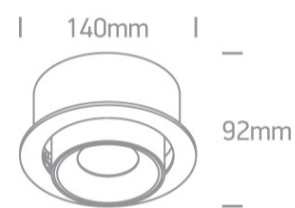

Gallery



Must be ordered separately



89015A

Related items



89015AT

Physical Specification


Item Group	08 Downlights Adjustable LED
Family	The COB Pop Out Range Aluminium
Order Code	11114R/W/W
Colour	White
Material	Aluminium
Shape	Circular
Height	92mm
Diameter	140mm
Cutout Hole Diameter	130mm
Recessed Ceiling	Yes
Depth Required	85mm
Indoor	Yes
Adjustable	2 Directions

Electrical Characteristics

Fitting

Input Type	Constant Current
Input Current	700mA
Safety Class	III
Power(Watts)	14W
IP Rating	IP20
Light Source	LED built in
LED Type	COB

LED Brand
Cable Length
F Mark

Bridgelux
40cm


Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram


3000K
1037lm
74,07lm/W
80
36°


Packing Info

Box Length
Box Width
Box Height
Box Weight
Pcs/Carton
Barcode
HS Code

20cm
20cm
15cm
1,15Kg
12
5291889046950
9405409900

Energy Label

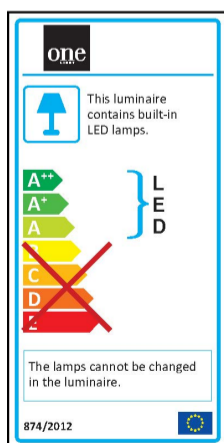

Warranty

3 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

