

08 Downlights Adjustable LED>The COB Pop Out Range Aluminium

11125R/W/C



25W LED adjustable COB Pop Out Range, IP20.

Requires 700mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

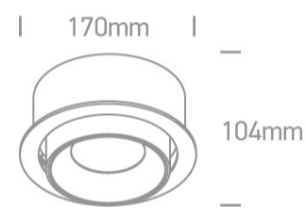

Gallery




Must be ordered separately



89030A

Related items

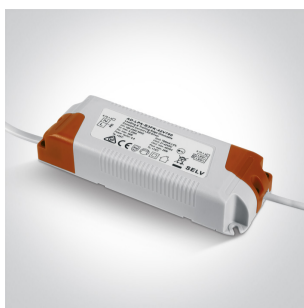

89030AT


Physical Specification

Item Group	08 Downlights Adjustable LED
Family	The COB Pop Out Range Aluminium
Order Code	11125R/W/C
Colour	White
Material	Aluminium
Shape	Circular
Height	104mm
Diameter	170mm
Cutout Hole Diameter	160mm
Recessed Ceiling	Yes
Depth Required	85mm
Indoor	Yes
Adjustable	2 Directions

Electrical Characteristics

Fitting	
Input Type	Constant Current
Input Current	700mA
Safety Class	III
Power(Watts)	25W
IP Rating	IP20
Light Source	LED built in
LED Type	COB

LED Brand	
Cable Length	
F Mark	

Bridgelux
40cm


Illumination Data

Colour Temperature	
Lumen Output	
Light Efficiency	
CRI	
Beam Angle	
Illumination Diagram	


4000K
2200lm
88lm/W
80
40°


Packing Info

Box Length	
Box Width	
Box Height	
Box Weight	
Pcs/Carton	
Barcode	
HS Code	

22cm
22cm
16cm
1,75Kg
8
5291889046974
9405409900

Energy Label

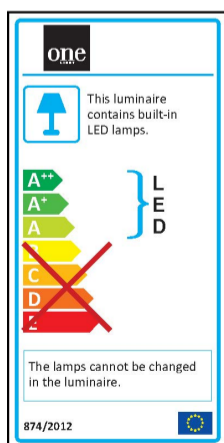

Warranty

3 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

