

08 Downlights Adjustable LED>The COB Round Downlights

11140B/W/C



40W COB LED extractable fitting with great flexibility on movement. Ideal for shops.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions



Gallery






Physical Specification

Item Group	08 Downlights Adjustable LED
Family	The COB Round Downlights
Order Code	11140B/W/C
Colour	White
Material	Die Cast
Shape	Circular
Height	135mm

Diameter	190mm
Cutout Hole Diameter	180mm
Recessed Ceiling	Yes
Depth Required	165mm
Indoor	Yes
Adjustable	2 Directions

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	40W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	1000mA
Voltage	38V
Safety Class	
Power(Watts)	38W
IP Rating	IP20
Light Source	LED built in
LED Type	COB

LED Brand

Bridgelux

Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

24-40W

Power Factor

0,9

Constant Current

Yes

1000mA

24-40V

IP Rating

IP20

Safety Class



Dimmable

No

Ambient Temp

50°C

Operating Temp

85°C

Housing Material

Plastic

Brand

Eaglerise

Protection

Short circuit protection

Illumination Data

Colour Temperature

4000K

Lumen Output

3300lm

Light Efficiency

82,5lm/W

CRI

80

Beam Angle

36°

Illumination Diagram



Packing Info

Box Weight

1,5kg

Pcs/Carton

8


Barcode

5291889044741

HS Code

9405409900

Energy Label

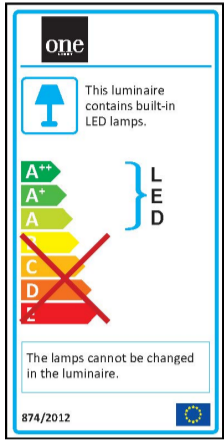

Certification & Warranty

Warranty

3 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

