


Power Supplies

12v & 24v Range

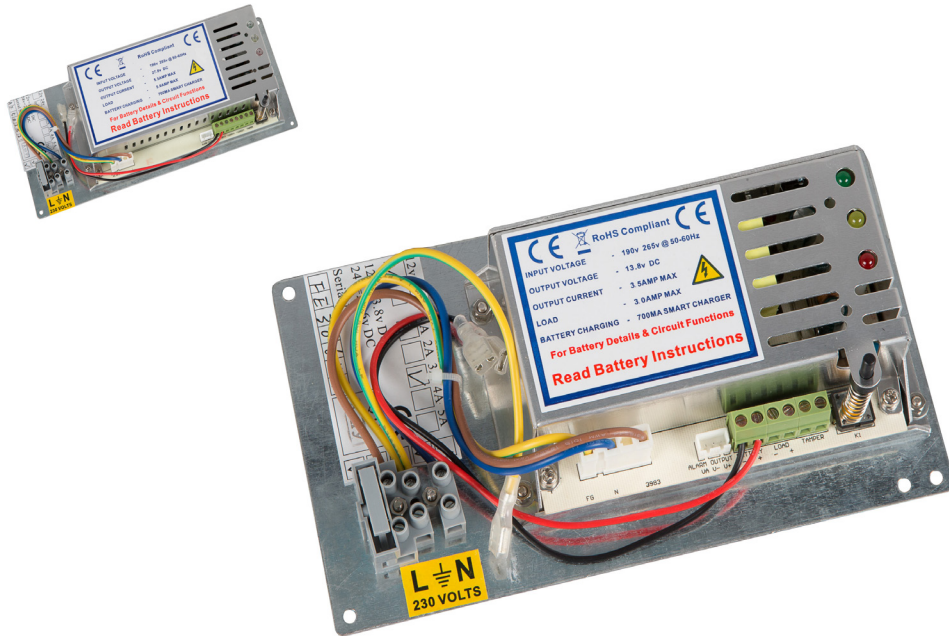


12v & 24v Power Supply - Chassis

Technical specifications

- 13.8VDC or 27.6VDC regulated output
- Deep discharge protection.
- Over-discharge/mains transient, current protection.
- LED diagnostics.
- Battery current limiting.
- Additional battery charging.

1201SM-CH	200x110x42 (mm)	12v 1amp Power Supply	450g (Unboxed)
1202SM-CH	200x110x42 (mm)	12v 2amp Power Supply	450g (Unboxed)
1203SM-CH	200x110x42 (mm)	12v 3amp Power Supply	450g (Unboxed)
1205SM-CH	270x110x48 (mm)	12v 5amp Power Supply	950g (Unboxed)
2401SM-CH	200x110x42 (mm)	24v 1amp Power Supply	450g (Unboxed)
2402SM-CH	270x110x48 (mm)	24v 2amp Power Supply	950g (Unboxed)
2403SM-CH	270x110x48 (mm)	24v 3amp Power Supply	950g (Unboxed)
2405SM-CH	270x110x48 (mm)	24v 5amp Power Supply	950g (Unboxed)

Other items in the RGL range.

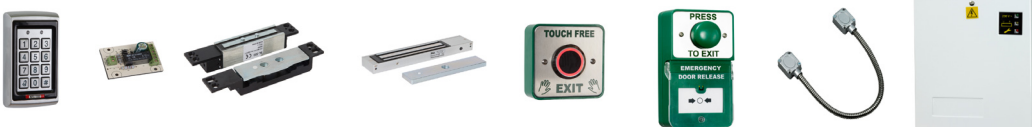

Power Supplies

FEATURES

- Switchmode technology
- Model mounted on steel chassis plate.
- Ventilation must be allowed if fitting into an existing housing.
- Wiring instructions
- More efficient and environmentally friendly.

