

Power Supplies

Monitored PSU Range




12 & 24v Monitored Power Supplies

Technical specifications

- Full current to load plus additional battery charging
- 13.8VDC or 27.6VDC regulated output
- Deep discharge protection
- Security front tamper
- Fault outputs:
 - Mains fail
 - Battery fail
 - Output fail
- Monitors battery health

1201SM-2MP	310x340x80 (mm)	12v 1amp Monitored Power Supply	3.07kg (Boxed) / 2.84kg (Unboxed)
1202SM-2MP	310x340x80 (mm)	12v 2amp Monitored Power Supply	3.07kg (Boxed) / 2.84kg (Unboxed)
1203SM-2MP	310x340x80 (mm)	12v 3amp Monitored Power Supply	3.07kg (Boxed) / 2.84kg (Unboxed)
1205SM-2MP	310x340x80 (mm)	12v 5amp Monitored Power Supply	3.07kg (Boxed) / 2.84kg (Unboxed)
2401SM-2MP	310x340x80 (mm)	24v 1amp Monitored Power Supply	3.07kg (Boxed) / 2.84kg (Unboxed)
2402SM-2MP	310x340x80 (mm)	24v 2amp Monitored Power Supply	3.07kg (Boxed) / 2.84kg (Unboxed)
2403SM-2MP	310x340x80 (mm)	24v 3amp Monitored Power Supply	3.07kg (Boxed) / 2.84kg (Unboxed)

Other items in the RGL range.

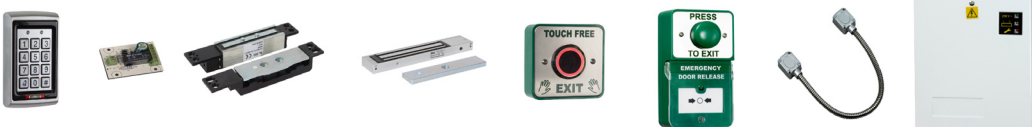

p: +44 (0) 1902 656667 | www.rgl.co



FEATURES

- Battery & mains monitoring
- Mild steel construction
- White powder coated finish
- Hinged style box
- Wiring instructions inside product
- More efficient and environmentally friendly
- Top, bottom and rear cable entry.
- Front tamper.

