


2/W VIDEO DISTRIBUTOR

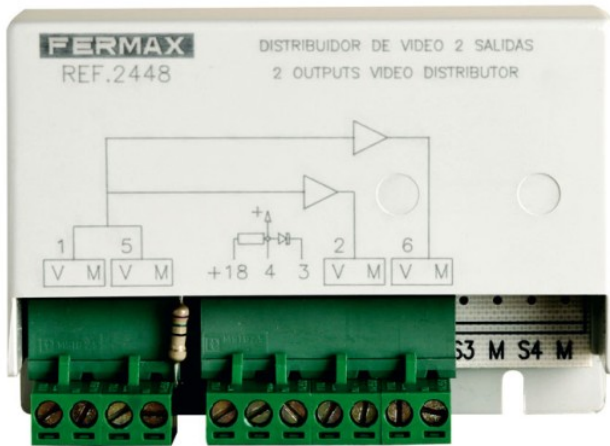

Reference: 2448

Video distribution in several outputs.
Must be used in all video signal bifurcations.

Available in 2 and 4 outputs.

DESCRIPTION

Video distribution in several outputs.
Must be used in all video signal bifurcations.

Available in 2 and 4 outputs.

Small size allows installation in electrical cabinets. Can be flush-fit in standard boxes 10x10 cm. With adhesive strips for fixing, or may be screwed directly onto the wall.

Conventional System: uses wires common to the whole installation plus 1 call wire (or call return) per home..

Recommended in small to medium-sized buildings (up to 50 residents approx), with several accesses and central guard unit. For residential complexes with general entrance and interior blocks.

Wiring:

- Audio door entry system: 4 common wires + N (1 call wire per home).
 - Video door entry system: 7 common wires + 1 video coaxial+N (1 call wire per home).
- Maximum distance in the installation based on the cable section used (see technical manuals).

TECHNICAL SPECIFICATIONS

The distributors have a built-in load resistance of 75 ohms, which will need to be cut only when the output of step nº 1 is being used, in other words, it will be cut in all the distributors in cascade, except for in the last one of the trunk section.

Power supply:

- by Ct (4): 8-14 Vdc.
 - by (+18): 15-24 Vdc.
- Input impedance: 75 ohms.
Video input: 0.8-1.6 Vpp

Dimensions: 62x85x20 mm (height-width-depth).

Power supply:

- Audio: 12 Vac
- Video: 18 Vdc

Weight: 0,1013 kg

Size of product when packed: 6,2x11,3x7,3 cm

EAN 13: 8,4243E+12