


## Features

- 27.6V dc output
- Cost effective switch mode technology
- High energy efficient - reducing energy bills
- Modular construction means easy maintenance and upgrading
- Full rated current to load +0.8A battery charging
- 90 to 264V ac range
- Deep discharge protection
- Electronic overload protection
- Mains transient protection
- LED indication:
  - Mains status
  - Output or battery fuse fail
  - Output short circuit or low voltage
  - Battery low or missing
- 3 year warranty

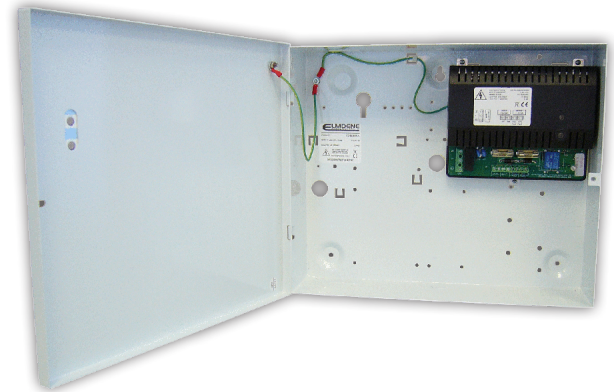

G2405N-C

## Description

24V dc G Range N Series power supply units designed for access control, fire systems (where compliance with EN54-4 is not required) and general purpose applications. The products use energy efficient switch mode technology and have a universal mains supply input (90–264V ac).

Elmdene's FOM4 or FOM8 units can be fitted to give 4 or 8 independent fused outputs if required.

The modular range consists of 1A, 2A, 3A and 5A power variants with full rated current to load and also feature a fully regulated output with low ripple and noise. Unboxed (module only) versions are also available if required.

### Advantages of Switch Mode Technology

Elmdene products using switch mode technology are typically 80-87% efficient. This can save your customers money by reducing their energy bills and carbon footprint. Switch mode technology provides for lower power consumption, provides cool running and energy efficient products that can result in improved long term reliability.

## Approvals

CE mark

## Technical Specifications

MAINS INPUT	90V – 264V ac at 50–60Hz
OUTPUT	27.6V dc
MAXIMUM CURRENT	Refer to product table
OPERATING TEMPERATURE	-10°C to 40°C at 95% RH

## Ordering Information

Part No	Amp Rating	Box Size (mm) H x W x D	Will Fit Battery Size
G2401N-C	1.0	275 x 330 x 80	2x12V 7Ah
G2401N-R		410 x 390 x 90	2x12V 17Ah
G2402N-C	2.0	275 x 330 x 80	2x12V 7Ah
G2402N-R		410 x 390 x 90	2x12V 17Ah
G2403N-C	3.0	275 x 330 x 80	2x12V 7Ah
G2403N-R		410 x 390 x 90	2x12V 17Ah
G2405N-C	5.0	275 x 330 x 80	2x12V 7Ah
G2405N-R		410 x 390 x 90	2x12V 17Ah
G2405N-H		420 x 420 x 180	2x12V 38Ah
Unboxed: Module only (no enclosure)			
G2401NU	1.0	134 x 84 x 42	Din Rail/Lugs
G2402NU	2.0	152 x 106 x 52	Din Rail/Lugs
G2403NU	3.0	157 x 143 x 55	Lugs
G2405NU	5.0		Lugs