

HEADQUARTERS

FAAC spa
Via Calari 10 40069 Zola Predosa (BO)
Tel. +39 051 61724 - Fax +39 051 758518
info@faac.it - www.faacgroup.com

FAAC SUBSIDIARIES

FAAC AG
Tel. +41 52 3461721
Fax +41 52 3461723
Illnau, Switzerland
www.faac.ch

FAAC FRANCE
Tel. +33 472218700
Fax +33 472218701
Corbas, France
www.faac.fr

FAAC GMBH
Tel. +49 8654 49810
Fax +49 8654 498125
Freilassing, Germany
www.faac.de

FAAC MIDDLE EAST
Dubai, Emirati Arabi
www.faac.ae
info@faac.ae

F.A.A.C. SA
Tel +34 91 6613112
Fax +34 91 6610050
Madrid, España
www.faac.es

FAAC UK LTD.
Tel. +44 1256 318100
Fax +44 1256 318101
Basingstoke Hampshire, UK
www.faac.co.uk

FAAC AUSTRALIA PTY LTD
Tel. +61 2 7565644
Fax +61 2 87565677
Homebush – Sydney, Australia
www.faac.com.au

FAAC NORD
Tel. +33 1 69191620
Fax +33 1 69536069
Massy, France
www.faac.fr

FAAC INDIA PVT. LTD
Tel. +91 120 3934100/4199
Fax +91 120 4212132
Noida – Delhi, India
www.faacindia.com

FAAC POLSKA SP.ZO.O.
Tel. +48 22 8141125
Fax +48 22 8142024
Warszawa, Polska
www.faac.pl

F.A.A.C. SA Delegación Cataluña
Tel. +34 93 4362000
Fax +34 93 5727994/4368225
Barcelona, España
www.faac.es

FAAC BENELUX
Tel. +32 50 320202
Fax +32 50 32024215
Brugge, Belgium
www.faac.be

FAAC G.E.S. M.B.H.
Tel. +43 662 8533950
Fax +43 662 85339520
Wals – Siezenheim, Austria
www.faac.at

FAAC INTERNATIONAL INC.
Tel. +1 307 6351991
Fax +1 307 6328148
Cheyenne, USA
www.faacusa.com

FAAC SCANDINAVIA AB
Tel. +46 36 376860
Fax +46 36 370780
Bankeryd, Sweden
www.faac.se

FAAC SHANGHAI
Tel. +86 21 68182970
Fax +86 21 68182968
Shanghai, China
www.faac.com.cn



560 Hydraulic operator for bi-folding doors

FAAC

For bi-folding doors for intensive use


- It is fixed on one leaf only and opens and closes by means of a telescopic arm
- In the event of a power cut, the release device on the operator enables manual opening and closing
- Anti-crushing guaranteed by a pair of by-pass valves and an inviolability system for the valves



Telescopic arm with accessories for installation



Remote manual release

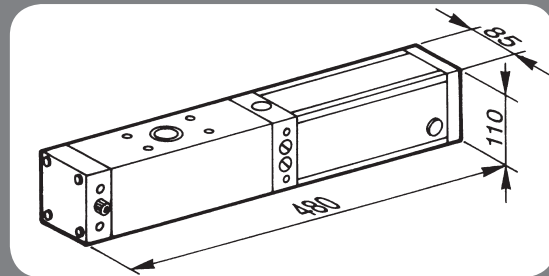

Dimensions of the unit.

TECHNICAL SPECIFICATIONS 560

| | 560 CBAC | 560 SB | 560 CBACR |
|-------------------------------------|--------------------------------|--------|------------|
| Power supply voltage | 230 Vac (+6% - 10%) 50 (60) Hz | | |
| Electric motor | single-phase bi-directional | | |
| Absorbed power | 220W | | |
| Absorbed current | 1A | | |
| Effective torque | 0 / 320 Nm | | 0 / 230 Nm |
| Angular speed | 12.4°/s | | 18.6°/s |
| Motor rotation speed | 1400 rpm | | |
| Pump flow rate | 1 l/min | | 1.5 l/min |
| Thermal protection on motor winding | 120°C | | |
| Operation ambient temperature | -20°C - +55°C | | |
| Weight with oil | 12 kg | | |
| Type of oil | FAAC HP oil | | |
| Protection class | IP55 | | |
| Operator dimensions (LxDxH) | 480 x 85 x 110 | | |