


3.5" VDS BASIC SMILE MONITOR

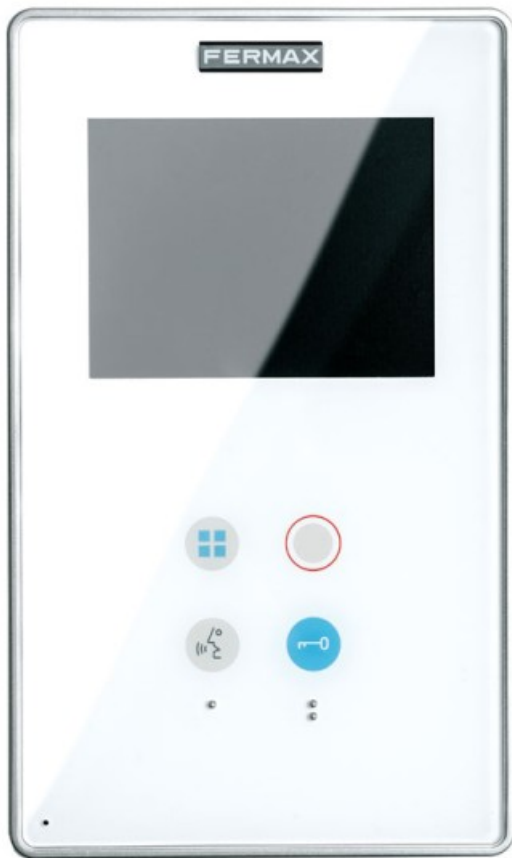

Reference: 6545

Smile Monitor. White.

DESCRIPTION

Smile Monitor. White.

Video door entry COLOUR monitor. TFT screen 3.5".

Installed in homes, lets you communicate with the outside panel, open the door and see the visitor on the built-in screen .
Smile is a new video entry experience.

It is cool and smart. With a design that allows its perfect integration in any surrounding.

An advanced management monitor, with **hands-free communication**, high-performance features and user friendly.
Compact and essential design. Its TFT screen and its capacitive touch buttons remain behind an ultra-resistant transparent polycarbonate sheet with ultraviolet protection.

Smile is the result of a refined design which has reduced and stylized its components to the minimum expression.

VDS system:

Simplified installation audio and video door entry system that does not use house call wires. The call is made by transmission of a digital call code generated by the VDS amplifier.

- In new works, installation can be carried out with the following type of wiring: 5 wire / 3 wire + Coaxial (video).

Lets you manage up to 199 homes, 2 entrance accesses and a central guard unit.

Maximum distance from first access to last home: 200 m.

VDS amplifier comes with voice synthesizer as standard issue.

When the door release is activated a message is heard: "Door open, please close after entering".

The home terminals require simple programming done from the outdoor panel. By means of this programming a call code is assigned to each terminal (telephone or monitor).

Communication is private.

Wiring. Audio: 3-wire bus. Video: 5 wire / 3 wire + Coaxial (video).
Maximum distance from first access to last home: 200 m.

TECHNICAL SPECIFICATIONS

Colour 3,5" TFT screen.

Resolution: 320 (H) x 240 (V)

Surface

Surface mounted, super slimline profile stands out only 20 mm from the wall.

Smile 3,5" 103x172x20 (width) x (height) x (depth) mm

Flush

When Smile is flush-mounted, only 4 mm of its profile stands out. This type of installation uses the same terminal, incorporating only flush box and decorative frame.

Dimensions once flush-mounted:

Smile 3,5" 127x196x4(width) x (height) x (depth) mm

Decorative frame 7" 209,20x196,2(width) x (height) x (depth) mm

Flush box 7" 198x186x44(width) x (height) x (depth) mm

Power supply: 18 Vdc

Door release and guard unit call button.

Auto-on button for main and secondary camera activation (sequentially).

Button to start communication.

Button to end communication.

Call volume control

Colour, brightness and contrast control.

Door bell: for direct house call button connection to monitor/telephone.

With 2 pushbuttons for additional functions (without functions assigned).

Private communication. Conversation secrecy.

Totally hands-free operation; once the outdoor panel-home channel is activated, communication is simultaneous.

Consumption:

- in standby: 33 mA

- active: 550mA

Monitor with OSD display: incorporates a user-friendly menu through graphical icons so that the installer can perform the programming of the monitor functions according to the needs of the installation and also so that users can access the user settings for customization, i.e. the usage profile: brightness and contrast, type and volume of ringtone, additional functions, activate and deactivate silent mode, etc...

Weight: 0,3563 kg

Size of product when packed: 4,7x20,8x14,5 cm

EAN 13: 8,4243E+12