


## CITY PANEL 4+N S5 AP206

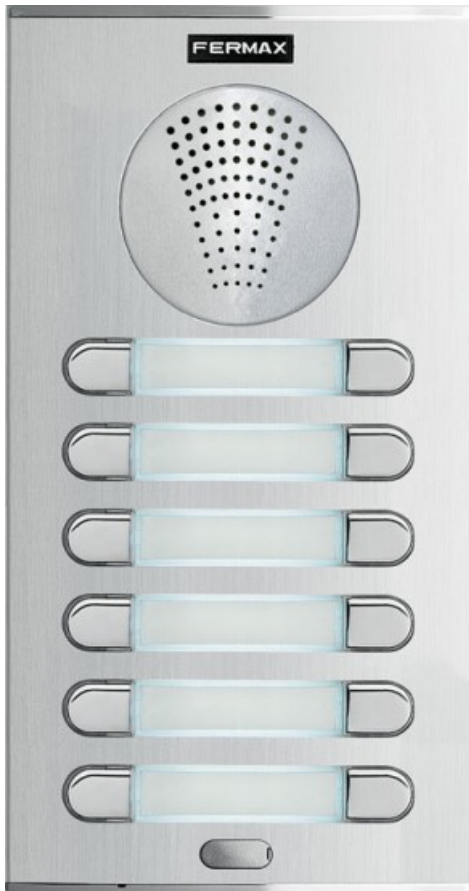

**Reference:** 70131

Installed in the accesses to the building, they enable communication with homes, door opening, guard unit call , etc.

### DESCRIPTION

Installed in the accesses to the building, they enable communication with homes, door opening, guard unit call , etc.

New Cityline Panel:

CityLine is the "continuous profile" outdoor panel line for buildings.

This new panel model is more robust, more luxurious and higher design and functional quality. The new design, in its video entry version, includes audio and video functions in the same module.

Colour aluminium

Injected zamak chrome finish Call buttons, in line with the curved panel profile. Sealed for outdoors. Equipped with special gold plated contacts for lasting durability.

Pressing the call button is confirmed by an acoustic signal from the amplifier.

Pushbuttons include a polycarbonate card slot (front access) to insert a label with the home owner's name and door number. Built in lighting lets you see the card slots, even in pitch dark.

Conventional System: uses wires common to the whole installation plus 1 call wire (or call return) per home..

Recommended in small to medium-sized buildings (up to 50 residents approx), with several accesses and central guard unit. For residential complexes with general entrance and interior blocks.

Wiring:

- Audio door entry system: 4 common wires + N (1 call wire per home).

- Video door entry system: 7 common wires + 1 video coaxial+N (1 call wire per home).

Maximum distance in the installation based on the cable section used (see technical manuals).



## TECHNICAL SPECIFICATIONS

Lighting LEDs consumption: 3,5 mA per card slot.

Series 5 Panel.

- Panel measurements: 130x246 mm (width-height):
- Flush-fit box dimensions:: 115x233x45 mm (height-width-depth).
- Surface mounted box dimensions: 130x246x33 mm (height-width-depth).

Power supply:

- Audio: 12 Vac
- Video: 18 Vdc

Consumption:

- in standby: 180 mA.
- call: 700 mA.
- active audio: 480 mA.
- audio+video: 560 mA (camera consumption: 80mA)
- Card slot module LED lighting: 35 mA per module.

IPK-437

Audio capacity home-outdoor panel: 2W

Audio capacity outdoor panel-home: 0.15W

Two-way volume control

Operating temperature: -10 to 60 °C

**Weight:** 0,954641 kg

**Size of product when packed:** 26,5x13,8x7 cm

**EAN 13:** 8424299701318