



Electronics Ltd

SURFACE ARMATURE HOUSINGS (FIRE DOORS)


MAGNETIC LOCK

Fire tested range of maglocks and brackets from a market leader in access control.

FIRE TESTED to BSEN1634-1-2014 & BS476:Part22:1987 (30, 60, 90 & 120 min timber door-sets)



AH600 / AH1200

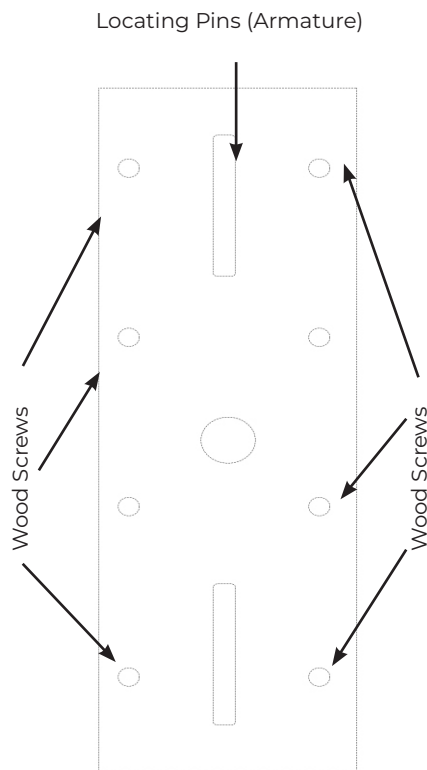

SPECIFICATION

- AH300 / AH600 / AH1200
- Light and strong aluminium armature
- Multiple fixing holes for holding strength
- Supplied with fixing screws and armature securing bolt
- Removes the need to drill through the door

The armature housing has been designed and fire tested to ensure that it retains the integrity of the fire door after installation.

It does this by removing the requirement to drill through the door to install the armature plate.

FEATURES

- AH300 / AH600 / AH1200
- Fire rated (30, 60, 90 & 120 min timber door set)
- Clean and compact design

Suitable for following products:

- ML600 / ML600-M
- ML600-D / ML600-D-M
- ML600-MDS

- ML1200 / ML1200-M
- ML1200-D-M

- ML300



AH300

OTHER PRODUCTS

EBNT/TF-1



120ISM-1



BK600-F-L/AB



DU-GB/PTE



DIMENSIONS

- AH300
- 145L x 43W x 16D (mm) (140g Boxed)
- AH600
- 189L x 52W x 16D (mm) (160g Boxed)
- AH1200
- 193L x 74W x 20D (mm) (200g Boxed)

CONTENTS

- AH300 / AH600 / AH1200
- Armature Housing
- Armature fixing kit



Manufactured by a BSIA Member