

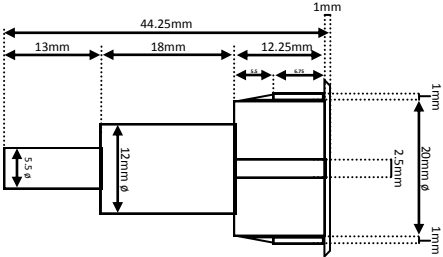
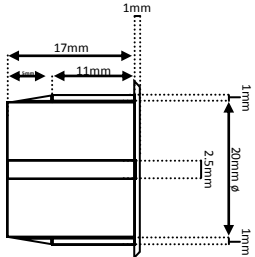



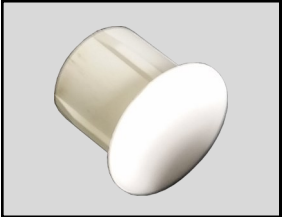


FRONT	<p align="center">CONTACT</p> 	<p align="center">MAGNET</p> 	<p>DESCRIPTION</p> <p>Grade 2, Class III 4 wire flush contact for steel doors. Circular plate. Single reed, normally closed. <i>(complete circuit when magnet present).</i></p>
SIDE			<p>VARIANTS</p> <p>AR02 2 TERMINAL VARIANT AR04 RESISTORED VARIANT</p> <p>ACTIVATION</p> <p>Reed switch, ~15-20mm operating gap <i>(in steel)</i>.</p>
BACK			<p>WIRING</p> <p>RED WIRES TAMPER LOOP WHITE WIRES REED SWITCH</p> <p>MATERIALS</p> <p>Plastic casing. Ferrite/Alnico V magnet. Rhodium reed.</p>
IMAGE			<p>TEMPERATURE RANGE</p> <p>-40 to +50 degrees Celsius.</p> <p>ELECTRICALLY RATED AS FOLLOWS</p> <p>500mA Max DC. 500mA Max AC.</p> <p>1 – 100v DC. 125v AC Max.</p>



KNIGHT
FIRE & SECURITY

Unit 84 Seawall Road Ind. Estate
Cardiff UK CF24 5TH
Tel: +44 (0) 2920 488 129
Fax: +44(0) 2920 489 132

Drawing #: AR03
Drawn: Gareth Carpenter
Date: 01/04/2018
Revision: 1

All dimensions in mm
Do not scale



© Knight Fire & Security Products Ltd
All cases of infringement will be pursued.