

# SPECIFICATION SHEET

## LED BATTEN FITTINGS



The LED Batten fittings are suitable for the replacement of a fluorescent fitting or for an economical LED lighting solution for corridors and large spaces.

### Applications:

- Commercial Sites
- Educational Providers
- Retail



Image shown BF420W-1


### Specification

<b>LED:</b>	48-288pcs of SMD 2835
<b>Material:</b>	Powder coated metal body and polycarbonate diffuser
<b>Colour Temperature:</b>	4100K
<b>Guarantee:</b>	5 Years
<b>Life Expectancy:</b>	50,000 Hours
<b>Working Temperature:</b>	-15°C - 45°C
<b>Beam Angle:</b>	120°
<b>CRI:</b>	>80 Ra

### Additional Information

- For emergency versions see next page.
- IK03 - Polycarbonate diffuser.
- IK07 - Metal body.
- White base and opal diffuser.
- Internal Microwave sensor (WFLEDMS) is only suitable for twin versions.

### Dimensions

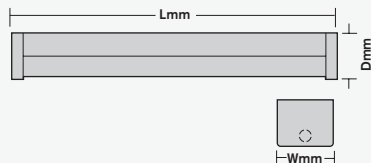

Code	Description	Single / Twin	Lumen Output	Power Factor	Dimensions (L x W x D mm)
BF210W-1	10W	Single	1000lm	0.5	620 x 69 x 82
BF420W-1	19W	Single	1900lm	0.5	1230 x 69 x 82
BF530W-1	24W	Single	2500lm	0.95	1530 x 69 x 82
BF630W-1	28W	Single	3000lm	0.95	1795 x 69 x 82
BF440W-1	37W	Twin	3700lm	0.5	1230 x 109 x 82
BF550W-1	46W	Twin	4900lm	0.95	1530 x 109 x 82
BF660W-1	56W	Twin	6000lm	0.95	1795 x 109 x 82
MSLEEXT	External LED Microwave Sensor	Single	-	-	95 x 46 x 26
WFLEDMS-1	Internal LED Microwave Sensor	Twin	-	-	115 x 37 x 25