

SPECIFICATION SHEET

LED EMERGENCY BATTEN FITTINGS



The LED Batten fittings are suitable for the replacement of a fluorescent fitting or for an economical LED lighting solution for corridors and large spaces.

Applications:

- Commercial Sites • Educational Providers • Retail



Image shown BF440WE-1


Specification

LED:	120-288pcs of SMD 2835
Material:	Powder coated metal body and polycarbonate diffuser
Colour Temperature:	4100K
Guarantee:	5 Years
Life Expectancy:	50,000 Hours
Working Temperature:	0°C - 45°C
Power Factor:	0.95
Beam Angle:	120°
CRI:	>80 Ra

Additional Information

- Standard versions available on previous page.
- IK03 - Polycarbonate diffuser.
- IK07 - Metal body.
- White base and opal diffuser.

Dimensions

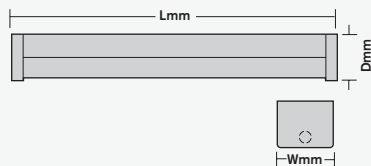

Code	Description	Lumen Output	Dimensions (L x W x D mm)
BF440WE-1	39W	3900lm / 390lm in EM mode	1230 x 109 x 82
BF530WE-1	25W	2500lm / 600lm in EM mode	1530 x 69 x 82
BF550WE-1	48W	4900lm / 392lm in EM mode	1530 x 109 x 82
BF660WE-1	58W	6000lm / 399lm in EM mode	1795 x 109 x 82
MSLEEXT	External LED Microwave Sensor	-	95 x 46 x 26
WFLDMS-1	Internal LED Microwave Sensor	-	115 x 37 x 25