CDVI Group

DIAX **RETROFIT HOUSINGS**

A WIDE RANGE OF RETROFIT HOUSINGS SUITABLE FOR ALL YOUR NEEDS


BO800RN Retrofit housings (2 x 400kg)









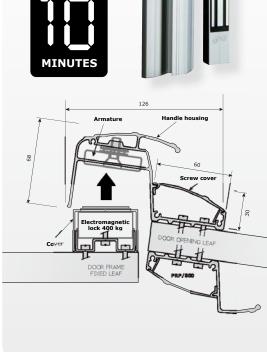



- NF S 61-937.
- Holding force: 2 x 400 kg.
- Ultra-quick installation**.
- Pre-drilled sections (adjustable).
- Pre-assembled.
- Attractive.
- Width overlapping the previous installations.
- Electromagnetic locks with terminal block.
- Groove at back of the magnet housing for easy wiring access.
- Holding force: 2 x 400 kg.
- End caps for the ends of the handles and technical column.
- Options:
- three 400kg electromagnetic locks
- (Holding force: 1200kg 12/24V dc), Installation on glass door: UBKU & UBK25,
- RAL colour,
- Cut.
- Voltage: 12/24/48V dc.
- Consumption per 400kg electromagnetic lock: - 12V dc = 550mA.
- 24V dc = 275mA.
- Consumption for the twice 400kg electromagnetic lock in 48V dc = 275mA.



CODE	REFERENCE	DESCRIPTION
F0519000039	BO800RN	2500MM 2X400KG RETROFIT HOUSING
F0519000045	BO800RN3M	3000MM 2X400KG RETROFIT HOUSING
F0519000042	B01200RN	2500MM 3X400KG RETROFIT HOUSING
F0519000055	PRP800	REINFORCEMENT SECTION WITH HANDLE FOR OPPOSITE SIDE OF THE DOOR
F0517000001	UBKU	U-BRAKET GLASS DOOR FIXING FOR ARMATURE PLATE
F0517000007	UBK25	2500MM U-BRAKET FOR GLASS DOOR
F0519000017	RAL	RAL COLOUR OPTION
F0519000018	COUPEBANDEAU	HOUSING CUTTING OPTION

* Refer to Limited Lifetime Warranty Conditions. ** Film on request.