




CA2200P

CIAO WALL-MOUNTED MODULE FOR 2/4/8/16 BUTTONS. S2

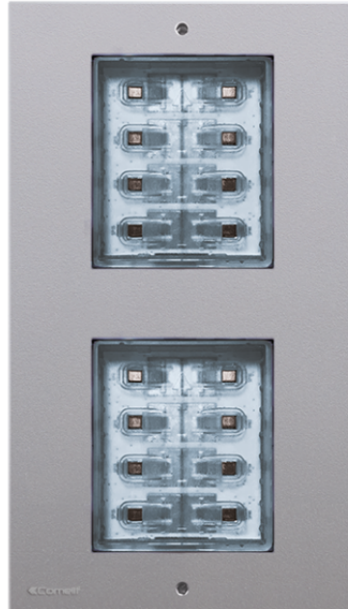

Ciao series button module with die-cast aluminium front cover and nameplates with white LED backlighting. To be finished with 2/4/8/16 call buttons (art. CA9210, CA9211, CA9212 and 2 x CA9212 respectively), available to purchase separately. Supplied with a surface-mount installation support. Can be used alongside up to 4 button modules (both horizontally and vertically).



CA2200P

CIAO WALL-MOUNTED MODULE FOR 2/4/8/16 BUTTONS. S2

COMPATIBLE SYSTEMS

Audio Simplebus 2 with power supply art. 1210/1210A	Yes
---	-----

ELECTRICAL CHARACTERISTICS

Absorption in stand-by (mA)	0.62
Type of power supply	Power supply from video door entry bus
Maximum absorption (W)	0.62

HARDWARE FEATURES

Number of push-buttons (n°)	16
-----------------------------	----

SETTINGS

Backlight brightness	Yes
----------------------	-----

ENVIRONMENTAL AND COMPLIANCE FEATURES

Operating humidity (RH max) (%)	25 ÷ 95
Environmental class	III

GENERAL FEATURES

Backlight colour	White
Call type	Push-buttons
CE certifications	RoHS II - 2011/65/UE (EN IEC 63000:2018), EMC 2014/30/UE (EN 61000-6-1:2007 , EN 61000-6-3:2007+A1:2011)
IP protection rating	IP54
Type	Monoblock
Type of buttons	Mechanical

MAIN FEATURES

Vandal Resistant rating (IK code)	IK08
Height (mm)	172
Width (mm)	100



CA2200P

CIAO WALL-MOUNTED MODULE FOR 2/4/8/16 BUTTONS. S2

MAIN FEATURES

Depth (mm)	28
Operating temperature (°C)	-25 ÷ 55
Supply voltage	33VDC

GENERAL DATA

Type of finishing materials	Die cast aluminum
Product color	Grey RAL 9006

MOUNTING/INSTALLATION

Wall-mounted	Yes
--------------	-----