

SPECIFICATION SHEET

LED COB ANTI-GLARE DOWNLIGHT

The circular COB LED Downlight is the ideal replacement for traditional 'PL' fittings. The deep bezel reduces glare and ensures a modern, crisp light.

Applications:

• Cinemas and Theatres • Hospitality • Retail



bridgelux®


Specification

LED:	Bridgelux COB
Material:	Aluminium
Lumen Output:	3000 - 3200lm
Colour Temperature:	4000K
Guarantee:	3 Years
Life Expectancy:	50,000 Hours
Working Temperature:	-20°C - 65°C
Beam Angle:	60°
CRI:	>80 Ra

Additional Information

- Aluminium heat sink resulting in better heat dissipation
- Easy connection
- Environmentally friendly
- High temperature resistant, flame retardant
- White finish
- Diamond facet reflector
- Emergency Conversion: EMLEDKIT2

Dimensions

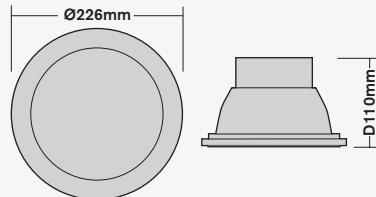

Code	Description	Lumen Output	Dimensions (Ø x D / L x W x D mm)	Cut Out (Ø mm)
COBDLAG30W-40	30W	3000-3200lm	226 x 110	210
COBDLAG30W-DRIVER			140 x 45 x 27	