

SPECIFICATION SHEET

LED COB SQUARE RIM ADJUSTABLE DOWNLIGHT



The square bezel fitting with a tilt-adjustable circular COB LED downlight. Ideal for shopping centres and reception areas, the fittings can be joined together in a grid.

Applications:

• Cinemas and Theatres • Hospitality • Retail



EPISTAR


Specification

LED:	Epistar COB
Material:	Aluminium
Lumen Output:	2900lm
Colour Temperature:	4000K
Guarantee:	3 Years
Life Expectancy:	50,000 Hours
Working Temperature:	-20°C - 65°C
Beam Angle:	45°
CRI:	>80 Ra

Additional Information

- Aluminium heat sink resulting in better heat dissipation
- Cut out: 150 x 150mm
- Easy connection
- Environmentally friendly
- High temperature resistant, flame retardant
- White finish
- Fittings can be joined together using the connector brackets supplied
- Emergency conversion: EMLEDKIT2

Dimensions

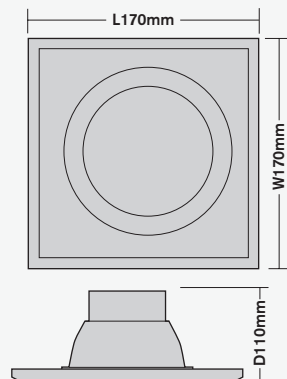

Code	Wattage	Lumen Output	Dimensions (Ø x D mm)	Cut Out (Ø mm)
COBDLSRA30W-40	30W	2900lm	170 x 170	110