

C6P

3 Megapixel Wireless Fisheye




Introduction

EZVIZ products have been designed for your entertainment, communication, security. When you install the EZVIZ APP on your smartphone or tablet, EZVIZ devices will be connected to the cloud via their QR code and will immediately be online. With EZVIZ you can talk to your loved ones, watch your child's progress when you are away, keep an eye on your home, interact with your four-legged friends, prevent household accidents.

Main Features

- ◇ High quality metal body, excellent design and production, high corrosion resistance.
- ◇ 3 megapixel, starlight level sensor, resolution up to 1344× 1344.
- ◇ Support 360° all-direction monitor, one camera cover whole area.
- ◇ Support various viewing mode like fisheye panorama, expanded view, two or four split screens.
- ◇ Support IR cut filter, true day/night monitor .
- ◇ High-efficiency infrared fill light, long service life and up to 7.5 meters irradiation distance.
- ◇ Built-in microphone and speaker, support two-way audio, 5 meters audio pickup.
- ◇ Support Micro SD card up to 128GB.
- ◇ Support 2.4G/5G dual band Wi-Fi, smart configuration via QR code.
- ◇ Support EZVIZ Cloud, remote video and alarm services.

Dimensions

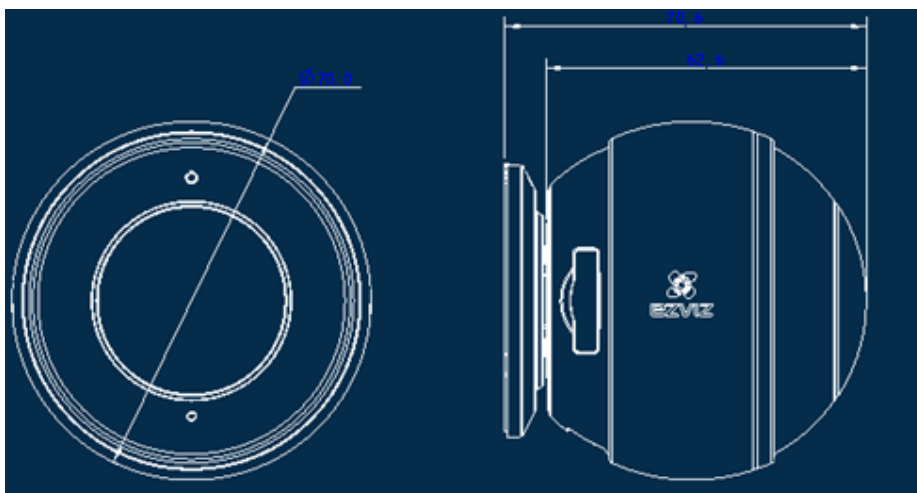

Model	CS-C6P-7A3WFR
Camera	
Image sensor	3 megapixel 1/2.8" Progressive Scan CMOS
Minimum illumination	0.01Lux @(F2.2,AGC ON) ,0 Lux with IR
Shutter	Self-adaptive shutter
Lens	1.2mm@ F2.2, Horizontal angle : 180° Diagonal angle : 180°
Lens Mount	M12
Day & Night	IR cut filter
DNR	3D DNR
WDR	Progressive WDR
Compression	
Video Compression	H.264
H.264 Type	Main Profile
Video Bit Rate	HD; balance; and fluency. Adaptive bit rate
Image	
Max. Resolution	1344 × 1344
Frame Rate	50Hz/60Hz: 15 fps (1344 × 1344),
Image setting	Brightness, contrast, saturation, etc. (configure via Ezviz studio)
BLC	Support
Network	
Storage	Support Micro SD card (Max. 128G)
Smart Alarm	Motion detection
One-key configuration	Wi-Fi configuration via QR code
Protocols	Ezviz cloud proprietary protocol
Interface Protocol	Ezviz cloud proprietary protocol
General Function	Flicker filter, dual-stream, heartbeat, mirror image, password protection watermark
Wireless Parameters	
Standard	IEEE802.11a/b/g/n/ac
Frequency Range	2.412GHz ~ 2.462GHz/5.15GHz ~ 5.35GHz/5.725GHz ~ 5.825GHz
Channel Bandwidth	Support 20/40/80MHz
Security	WEP, WPA/WPA2, WPA-PSK/WPA2-PSK
Transmission Rate	11b: 11Mbps,11g :54Mbps,11n :135Mbps
General	
Operating Conditions	-10°C ~45°C, Humidity 95% or less (non-condensing)
Power Supply	DC 5V±5%
Power Consumption	8W MAX
IR Range	7.5 meters
Dimensions (mm)	70× 70× 70.6mm
Weight	222g