


CUBE-CAM - Indoor Wi-Fi Cube Camera

Compact, communicative & clear

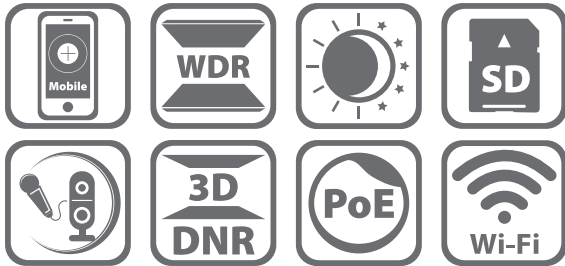

Key features

- Full-HD 1080p
- Two-Way Audio
- Wide Dynamic Range (WDR)
- Auto Day/Night mode
- 10m Infrared (IR) range
- Real-time HD video on the move
- Built-in PIR motion sensor
- Simple installation

Partcode	CUBE-CAM
Camera	
Resolution	2 Megapixel
Lens Options	2.8 mm (CUBE-CAM/28), horizontal field of view: 115.6° 4 mm (CUBE-CAM/4), horizontal field of view: 90°
Day & Night	IR cut filter with auto switch
Digital Noise Reduction (DNR)	3D DNR
Wide Dynamic Range (WDR)	120dB
Compression Standard	
Video Compression	H.264 / MJPEG / H.264+
Dual Streams	✓
Image	
Max. Resolution	1920 x 1080p (25 fps)
Image Settings	Support Rotate Mode, Saturation, Brightness, Contrast, Sharpness adjustable by client software or web browser
Back Light Compensation (BLC)	Support, zone configurable
Network	
Network Storage	NAS (Support NFS, SMB/CIFS), ANR
Alarm Trigger	Tampering Alarm, HDD Full, HDD Error, Network Disconnected, IP Address Conflicted, Illegal Login
Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6
Standard	ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI
General Function	One-key reset, Anti-flicker, Dual Streams, Heartbeat, Password Protection, Privacy Mask, Watermark, IP Address Filtering
Interface	
Communication Interface	1 RJ45 10M/100M Ethernet port
On-Board Storage	Built-in Micro SD/SDHC/SDXC slot, up to 128GB
Alarm	1 Alarm input, 1 Alarm output
Audio	1 Built-in Mic, 1 Built-in Speaker
Wi-Fi	
Wireless Standards	IEEE802.11b, 802.11g, 802.11n
Frequency Range	2.4GHz ~ 2.4835 GHz
General	
Operating Conditions	-10°C to +40-°C
Power Supply	DC12V or PoE (803.3af)
Power Consumption	Max. 5W
IR Range	Up to 10 meters
Dimensions	72.3 x 91.9 x 131.3mm (2.85" x 3.62" x 5.17")
Weight	400g (0.88lbs)
SAP Code	CUBE-CAM/28: 311300206 CUBE-CAM/4: 311300207