



# DC101R4.7

DC101,W/2,4.7K,RES,IN,SER & PAR,SFT,SPVD

## DC101-Series

---

The DC101-Series surface mount magnetic contacts are designed for use in installations where a small, sealed unit is required. The reed switch is totally encapsulated in an exclusive polyurethane potting compound preventing moisture from entering the switch and causing false alarms.

## Easy installation

---

The 16 mm standard gap distance allows for fast, easy installation and prevents false alarms from loose fitting doors. Recessed mounting holes make for clean-looking installations.

## High Quality components and materials

---

Reed legs are plated with rhodium or ruthenium, and hermetically sealed in dry nitrogen. This offers superior protection against sticking and provides a moisture free environment therefore preventing corrosion.



## Details

---

- Convenient surface mounting
- Standard 2 m wire length
- Tamper loop provided
- Neat and tidy design

# DC101R4.7

DC101,W/2,4.7K,RES,IN,SER & PAR,SFT,SPVD

## Technical specifications

### General

Application type	Surface Mount
Contact type	4K7 resistor
Connectivity	4 wires, 2.5 m

### Wired/wireless


Wired-wireless	Wired
----------------	-------

### Physical

Operating gap	15 mm
---------------	-------

### Standards & regulation

EN50131 grade	Grade 2
---------------	---------

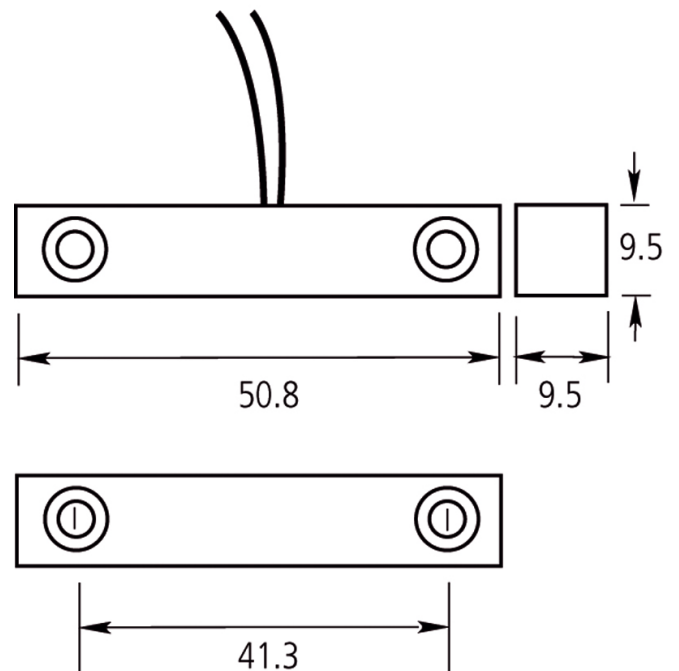

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.