

DC111


Balanced Triple Biased Ov.Con

High Security Contact

The triple biased reeds of the DC111 magnetic contact make defeat of the switch with external magnets virtually impossible. For added security, magnetic field tamper and pry tamper are standard features.

Applications

The DC111 is designed for protecting high-security facilities such as airports, warehouses, manufacturing plants, banks, and military bases.

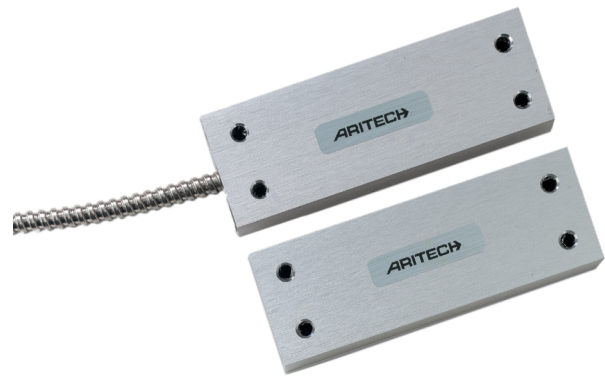

Details

- Triple-biased for increased security
- Pry tamper included
- No field adjustment
- Standard 2 m wire length
- Tamper loop provided

DC111

Balanced Triple Biased Ov.Con

Technical specifications

General

Application type	Surface Mount
Contact type	CO
Connectivity	6 wires, 2 m

Wired/wireless


Wired-wireless	Wired
----------------	-------

Physical

Dimensions magnet	108 x 38 x 19 mm
Dimensions contact / sensor	108 x 38 x 19 mm
Operating gap	5-15 mm

Standards & regulation

EN50131 grade	Grade 3
Certification	VdS, IMQ
Standards	VdS

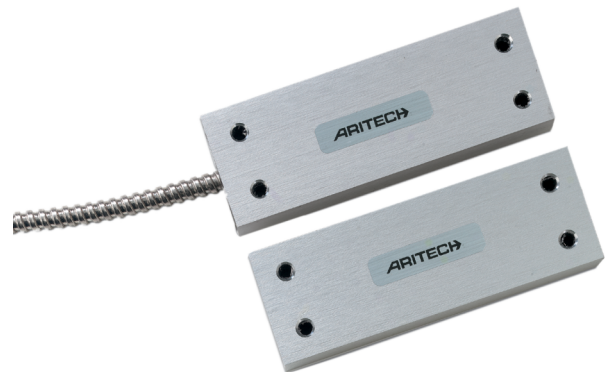

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.