

# DC128

## Industrial flush mount contact, high security grade 3, white

### Requirements for grade 3 magnetic contacts


---

The grade 3 magnetic contacts are high security contacts which do meet the following requirements: preciseness of opening distance, magnet polarisation, strength of the magnet

### Model with built in EOL resistors available

---

Though built in EOL resistors are not mandatory according to EN50131-2.6 requirements, Interlogix offers a model with built in EOL resistors for a quick installation (see how to Order information)

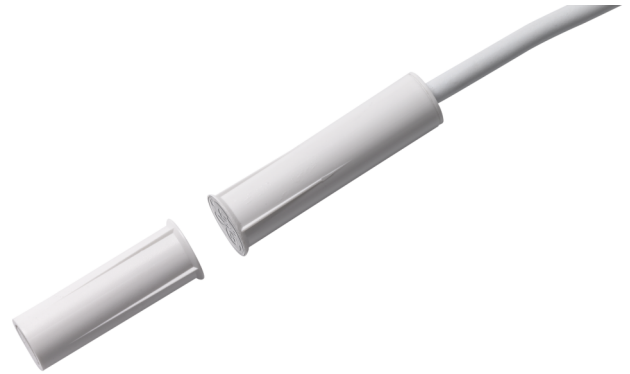

### Details

---

- EN 50131-2-6 Grade 3 and VDS certified
- 2m cable
- Tamper protected

# DC128

## Industrial flush mount contact, high security grade 3, white

### Technical specifications

---

#### General

---

Application type	Recessed Mount
Contact type	1 pin NC contact
Connectivity	LIYY 4 x 0.14 mm Cu tin-plated; Suitable for LSA IDC method of terminatio

---

#### Wired/wireless

---

Wired-wireless	Wired
----------------	-------

---

#### Electrical

---

Operating voltage	max 100V DC
Contact power	max 6W or 6 VA
Switching current	max 500mA
Contact resistance	max 0.15 Ohm

---

#### Physical

---

Colour	White
Material	ABS
Dimensions magnet	6 x 30 mm
Dimensions contact / sensor	8 x 32 mm
Operating gap	15 mm

---

#### Environmental

---

Operating temperature	-25 to 70°C
IP rating	IP67

---

#### Standards & regulation

---

EN50131 grade	Grade 3
---------------	---------

---

