


## DG502UP CUSTOMISE YOUR SYSTEM

### ► SYSTEM BLOCK DIAGRAM



## DG502UP INSTALLATION CONFIGURATION

### ► SYSTEM BLOCK DIAGRAM

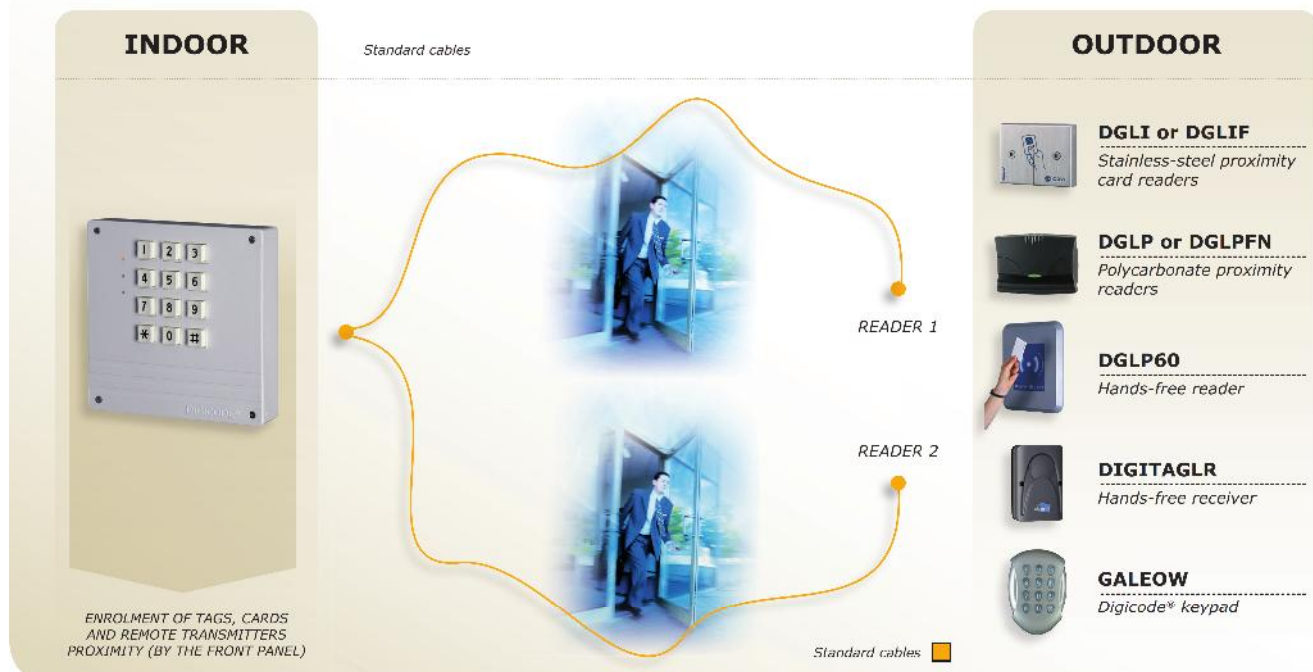

\* Refer to Limited Lifetime Warranty Conditions.




STAND-ALONE ACCESS CONTROL

**DG502UP STAND ALONE 2-DOOR CONTROLLERS**

► FROM 1 TO 2 DOORS



- **2-Door controller.**
- **2 relay outputs.**
- **500 proximity tags.**
- **Self-contained electronics.**
- **Tamper switch.**
- **Audible and visual feedback (buzzer & LED).**
  
- Dimensions (L x W x D): 116 x 116 x 23mm.
- Material:
  - DG502U/A = Aluminium front panel and keys,
  - DG502U/P = Polycarbonate front panel and keys.
- 12-key keypad.
- 1 master code 5 digits.
- Output: 2 relays 1 RT 3A/125V ac.
- 1 tamper switch on the front panel.
- Programmable relay output (1 to 99 seconds).
- Optional: up to 2 remote readers.
- E2PROM permanent memory.
- 12V ac/dc power supply.
- Consumption: 200mA.

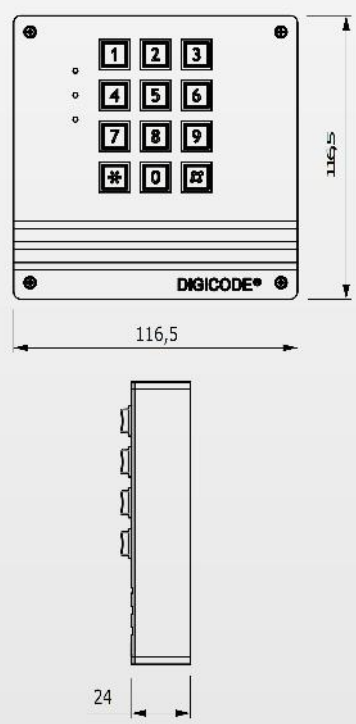

- RoHS
- WEEE
- IP53
- CE Certification
- 10°C to +70°C
- Certified FCC CFR 47 Part 15 compliant

**Recommended power supplies**

ARD12      BS60

CODE	REFERENCE	DESCRIPTION
F0101000046	DG502UP	STANDALONE 2-DOOR CONTROLLER - POLYCARBONATE

\* Refer to Limited Lifetime Warranty Conditions.