

Request to Exit Button Range




Plastic Green Dome Button

Technical specifications

- Contacts : Double pole N/O - N/C.
- Output : 4 AMP contact @ 30 V AC/DC.
- Wear resistant legend.
- Security screws (Allen key type).
- Internal use only.

Approval : EN 50133 Industrial Codes of Practice

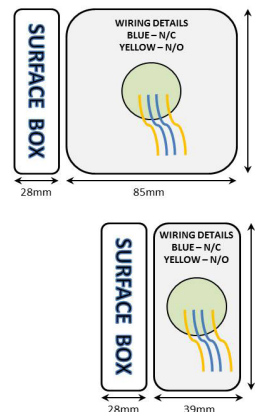

FEATURES

- All plastic green button.
- Momentary operation
- High impact plastic back box.
- Can be surface or flush fitting.
- Easy clean surface. Ideal for general/sensitive areas.
- Screw footprint for flush fitting onto standard back box.
- 2 year warranty

EBGB01P/PTE/W	85x85x28 (mm)	Standard green dome button	PRESS TO EXIT	134g (Boxed) / 100g (Unboxed)
EBGB01P/DR/W	85x85x28 (mm)	Standard green dome button	DOOR RELEASE	134g (Boxed) / 100g (Unboxed)
EBGB05P/PTE/W	85x39x28 (mm)	Architrave green dome button	PRESS TO EXIT	94g (Boxed) / 64g (Unboxed)
EBGB05P/DR/W	85x39x28 (mm)	Architrave green dome button	DOOR RELEASE	94g (Boxed) / 64g (Unboxed)

Other items in the RGL range.

