

# PROXIMITY READER CONTROL UNIT EVE196-X3



REAL TIME



Anti-clone  
Guarantee



Remote access




### KEY FEATURES...

- MIFARE 13.56MHz proximity keys
- 3000 proximity key capacity
- Networkable device
- Time zone control
- 8 week types
- Email alerts
- Real time remote management
- Noralsy proximity keys with Anti-Clone Guarantee

PROXIMITY READER ACCESS CONTROL

REFERENCE	EVE196-X3
<b>MECHANICAL CHARACTERISTICS</b>	
Dimensions (HxWxD)	85 x 53 x 20 mm
Weight	80 g
Material	ABS
Screw fixings	M3 screws
<b>ELECTRICAL CHARACTERISTICS</b>	
Voltage	12VDC-18VDC
Consumption	225mA max (whilst relay is activated)
Relay	1no 5 Amp rated NO/NC programmable
Operating temperature	-10°C to +55°C
Norms	EN50082 / EN55022
<b>FEATURES</b>	
Bus	Max length 400 metres using Class E (CAT6) U/UTP in series
Device capacity	3000 proximity keys
Input	1no for exit button
Integral timeclock	Synchronises automatically with baticonnect.com
Alert	Email
Programming	www.baticonnect.com available 24/7/365

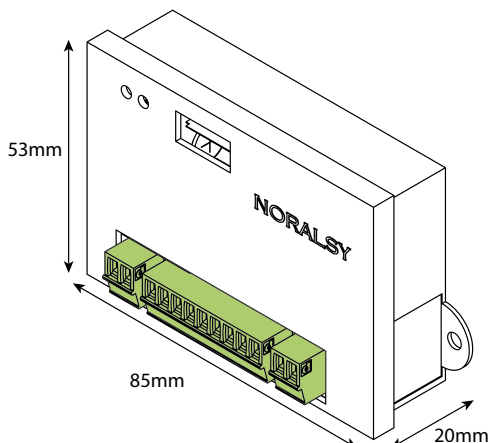

**24/7/365**

[www.baticonnect.com](http://www.baticonnect.com)

08000 156496  
[sales@ipdooreentry.co.uk](mailto:sales@ipdooreentry.co.uk)  
[www.ipdooreentry.co.uk](http://www.ipdooreentry.co.uk)  
 f in ipdooreentry

IP Door Entry Limited  
 Unit DC4 Prologis Park  
 Eastman Way  
 Hemel Hempstead  
 HP2 7DU