






# The ideal solution for large passageways in apartment blocks and industrial facilities

- Ideal for private or public car parks.
- The model for passages up to 2.5 m (001G2500) comes in the 230 V AC version, while the models for passages up to 3.75 m (001G3750 and 001G3751) and up to 6.5 m (001G6500 and 001G6501) are in the 24 V DC version.
- There is also a version in AISI 304 steel.
- It can be installed either to the left or right. The mounting procedures are easy and quick.
- A truly complete range of accessories to customise your installation, which includes a choice of safety accessories for peace of mind during operation.
- The special joint is for installing CAME barriers even when height is an issue when raising or lowering the boom, as in underground parking lots.

## **Dimensions** (mm)

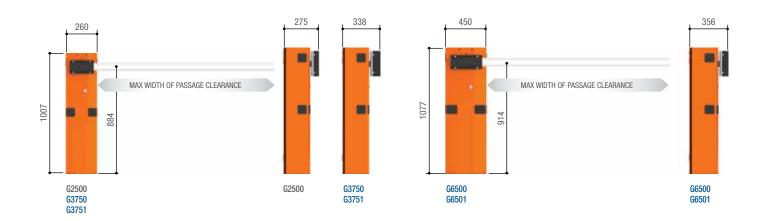

#### **Limits to use**

MODELS	G6500 ● G6501	G3750 • G3751	G2500
Max width of passage clearance (m)	6.5	3.75	2.5
<b>Technical features</b>			
MODELS	G6500 • G6501	G3750 • G3751	G2500
Protection rating (IP)	54	54	54
Power supply (V - 50/60 Hz)	230 AC	230 AC	230 AC
Motor power supply (V)	24 DC	24 DC	230 AC 50/60 Hz
Current draw (A)	15 Max.	15 Max.	1
Power (W)	300	300	120
Opening time at 90° (s)	4 ÷ 8	2 ÷ 6	4
Duty cycle (%)	INTENSIVE SERVICE	INTENSIVE SERVICE	30
Torque (Nm)	600	200	70
Operating temperature (°C)	-20 ÷ +55	-20 ÷ +55	-20 ÷ +55
Motor thermo-protection (°C)	-	-	150

# **THE COMPLETE RANGE**



 $\begin{tabular}{c|c} \textbf{Price} \ \mathfrak{L} \\ \hline \textbf{Code} & \textbf{Description} \\ \hline \end{tabular}$ 

Barrier with 230 V AC	gearmotor and on-board control panel	
001 <b>G2500</b>	Barrier in galvanised and painted steel. Fitted to take accessories.	£905.00

Accessories for: 00	01G2500	
001 <b>G0251</b>	White painted aluminium boom - dimensions: 60 x 40 x 2,700 mm.	£47.00
001 <b>G0461</b>	Package of n. 24 red adhesive refracting strips.	£19.00
001 <b>G0257</b>	Joint.	£181.00
001 <b>G02807</b>	Fixed support.	£77.00



# THE COMPLETE RANGE

Code	Description	Price £ (Excl. VAT)
Barriers with 24 \	/ DC gearmotor and on-board control panel	
001 <b>G3750</b>	Barrier in galvanised and painted steel. Fitted to take accessories.	£1,130.00
001 <b>G3751</b>	Barrier in AISI 304 satin-finished steel. Fitted to take accessories	£1 602 00



Accessories for: 0	01G3750 - 001G3751	
001 <b>G03750</b>	White painted aluminium boom with semi-oval section, complete with profile for covering the slot and rubber profile for impact protection. Boom length: 4 m.	£147.00
001 <b>G0402</b>	White painted aluminium boom with round section. Ø 60 mm, boom length: 4.2 m.	£66.00



Accessories for: 001	G03750	
001 <b>G03756</b>	The inner reinforcement for semi-oval boom is necessary for passage clearances wider than 2.5 m.	£12.00
001 <b>G03755DX</b>	Joint for semi-oval boom for right-hand barrier.	£260.00
001 <b>G03755SX</b>	Joint for semi-oval boom for left-hand barrier.	£260.00



MODELS	Ø 40 mm 001G02040 springs ● Ø 50 mm 001G04060 springs ● Ø 55 mm 001G06080 spri					
	WIDTH OF PASSAGE CLEARANCE					
BOOM COMPOSITION	1.5 ÷ 1.75	$1.75 \div 2.25$	$2.25 \div 2.75$	2.75 ÷ 3.25	$3.25 \div 3.5$	$3.5 \div 3.75$
Boom with profile for impact protection	•	•	•	•	•	•
Boom with profile for impact protection and 001G028401 luminous cord	•	•	•	•	•	•
Boom with 001G0465 rack	•	•		•	•	

Boom with 001G028401 lumonous cord and 001G0465 rack Boom with profile for impact protection and 001G02808 movable support Boom with profile for impact protection, 001G02808 movable support and 001G028401

Guide for the choice of the springs for boom: 001G06850									
MODELS	Ø 40 m	nm 001G02	040 springs	s • Ø 50 m	m 001G040	060 springs	🔵 Ø 55 m	m 001G060	80 springs
				WIDTH OF	PASSAGE (	CLEARANCE			
BOOM COMPOSITION	2 ÷ 2.5	$2.5 \div 3$	$3 \div 3.5$	$3.5 \div 4$	$4 \div 4.5$	$4.5 \div 5$	$5 \div 5.5$	$5.5 \div 6$	$6 \div 6.5$
Boom	•	•	•	• •		•	•	• •	• •
Boom with 001G02808 movable support	0	0	• •	• •	•	•	• •	• •	
Boom with 001G028401 luminous cord	•	•	• •	• •	•	•			
Boom with 001G02808 movable support and 001G028401 luminous cord	0	• •	• •		•	• •	• •		• •
Boom with 001G0465 rack	•	•	• •		•				
Boom with 001G028401 luminous cord and 001G0465 rack	•	0 0	• •	•	•	• •	• •		• •

Guide for the choice of the springs for boom: 001G03750

## THE COMPLETE RANGE

Accessories for: 001G03750 and 001G06850

4 m.

**Description** 

Code



Price £ (Excl. VAT)

Barriers with 24 V	/ DC gearmotor and on-board control panel	
001 <b>G6500</b>	Barrier in galvanised and painted steel. Fitted to take accessories.	£1,415.00
001 <b>G6501</b>	Barrier in AISI 304 satin-finished steel. Fitted to take accessories.	£2,170.00
Accessories for: (	001G6500 - 001G6501	
00000	AA (1)	0400.00



001 <b>G0602</b>	White painted aluminium boom with round section. Ø 100 mm, boom length: 6.85 m.	£168.00
001 <b>G06850</b>	White painted aluminium boom with round section, complete with profile for covering the slot. $\varnothing$ 100 mm, boom length: 6.85 m.	£239.00



001 <b>G028401</b>	LED luminous cord.	per m £8.00
001 <b>G028402</b>	Connection cable for luminous cord.	£10.00
Accessories for: 00	1G06850	
001 <b>G06802</b>	The inner reinforcement for round boom is necessary for passage clearances wider than	£15.00





Accessories for: 001G3750 - 001G3751 - 001G6500 - 001G6501				
002 <b>LB38</b>	Card for emergency functioning during blackouts and battery recharging.	£48.00		
23	three 12 V - 7 Ah batteries (not supplied).			



Balancing springs			
001 <b>G02040</b>	Ø 40 mm balancing spring. (YELLOW)	£ <b>45.00</b>	
001 <b>G04060</b>	Ø 50 mm balancing spring. (GREEN)	£57.00	
001 <b>G06080</b>	Ø 55 mm balancing spring. (RED)	£ <b>68.00</b>	



Accessories 001 <b>G0465</b>	Painted aluminium rack (L = 2 m modules).	£133.00
001 <b>G02807</b>	Fixed support.	£77.00
001 <b>G02808</b>	Movable support.	£ <b>74.00</b>
001 <b>G02809</b>	Package of n. 20 red adhesive refracting strips.	£ <b>22.00</b>
001 <b>G0468</b>	Support for applying on the cabinet the DELTA-I and DELTA-SI photocells.	£19.00
001 <b>G04601</b>	Adapter for applying the Kiaro series flashing light (KIARO'S support is necessary).	£10.00







### **CAUTION! RESPECT LIMITS TO USE INDICATED**

 $The \ 001G0468 \ cannot \ be \ used \ for \ barriers \ featuring \ boom \ with \ 001G0465 \ rack \ or \ 001G02808 \ movable \ support.$ 001G02808 For passage clearance up to max 3 m (for the 001G3750 and 001G3751 barriers) and up to max 5 m (for the 001G6500 and 001G6501 barriers). It is MANDATORY to use the 001G03756 inner reinforcement in the following cases:

- Always, when the boom features the 001G028401 luminous cord
- For passage clearance wider than 2.5 m, with 001G02808 movable support and 001G0465 rack.
- For passage clearances wider than 3 m.

It is MANDATORY to use the 001G02807 fixed support when the passage clearance is wider than 3 m.

The 001G0465 - 001G02808 items cannot be used together.

Prices for complete GARD Kits (with barrier arm and accessories included) can be found on pages 84-85.