



## GBX370

I.S. Galvanic isolator for AS372/FA370 series


### General

The GBX370 is a galvanic barrier specifically designed to drive sounders and beacons, which are located in intrinsic safe areas. It is recommended to be used in conjunction with the AS372, FA370 or FA370C.

### Application

The GBX370 functions like a "DC to DC converter" with current limiting, set at 45 mA. The input and output are galvanically isolated from each other.

It is designed for the connection of audible alarms and visual indicators, which needs to be located in an Intrinsically safe area. This makes it ideal for use with the AS372, when a sounder needs to be installed in an Intrinsically safe area, or with the FA370/FA370C when a beacon is required.

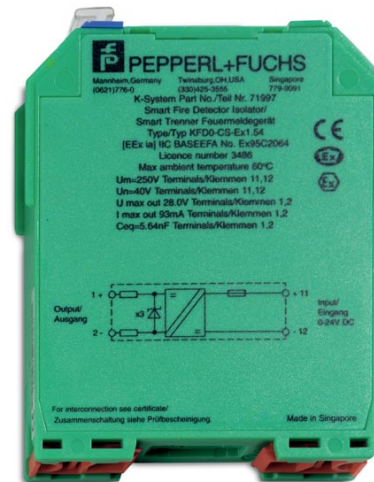

### Standard Features

- Output EEx ia IIC
- EMC acc. to NAMUR NE 21
- Up to SIL3 acc. to IEC 61508
- 45 mA Output

# GBX370

I.S. Galvanic isolator for AS372/FA370 series

## Specifications

Input	
Voltage	5 to 35 VDC
Current	7 mA at 18.5 VDC
	85 mA at 35 VDC
Power loss	1.3 W
Output	
Internal resistor	<= 294 ohm
Open loop voltage	>= 22.8V
Limit	Ie: >=45.3 mA, Ue : 9.1V
Rated current	45 mA
Ambient temperature	-20°C to +60°C
Mechanical specifications	
Protection degree	IP20
Weight	± 100 g
Dimensions	20 x 107 x 115 mm
Group, category, type of protection	II (1) G D [EEx ia] IIC (-20°C <= Tamb <= 60°C)
Type of protection [EEx ia]	
Explosion group	IIA IIB IIC
External capacitance	2.9 µF 0.82 µF 0.107 µF
External inductance	36.02 mH 17.72 mH 4.3 mH

## Ordering Information

Part No.	Description
GBX370	I.S. Galvanic isolator for AS372/FA370 series

