

D-TECT X Dual Tech Motion Detector

The BS8418 compliant D-TECT X Dual Tech detector is a battery powered outdoor motion detector designed to work with GJD's D-TECT X Wireless Receiver. It features a quad PIR sensor module and microwave sensor, stylish IP65 fully tampered housings with a discreet internal antenna. Units accept 2 x 3 volt CR123 batteries, 500m RF transmission range on 868MHz and individual code for pairing to the receiver.

The D-TECT X Receiver (GJD 392) can be linked in its base form to 4 detectors and this can then be expanded up to 16 detectors, with the use of the GJD393 D-TECT X Expander Module.


Due to the number of individual detector codes (in excess of 16M), multiple receivers can be used on any site.



PRODUCT CODES

GJD460 D-TECT X Dual Tech

DIMENSIONS

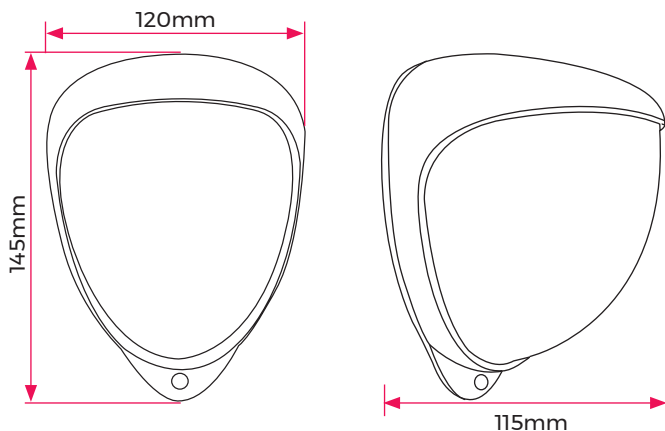

FEATURES

- Adjustable pan and tilt
- Dual tech PIR with Quad pyro and microwave detection technology
- Discreet internal antenna
- Wireless technology

BENEFITS

- Modern design
- Easy to install
- Highly cost effective
- Great for temporary installations
- Aesthetically pleasing design

SPECIFICATIONS


ACCESSORIES

GJD392	D-TECT X Receiver
GJD393	D-TECT X Expander Module
GJD394	D-TECT X Walk Tester
GJD397	D-TECT X Repeater
PMB1	Pole Mount

TRANSMISSION RANGE	500m Line of sight
DETECTION RANGE	15m x 15m
DETECTOR ORIENTATION	180° pan & 90° tilt
MOUNTING HEIGHT	Up to 6m - Optimum 3m
TAMPER SWITCHES	Front & rear tamper switches, case open and removal from wall
OUTPUTS FROM GJD392 D-TECT X RECEIVER - PER DETECTOR	1 N/Open Relay: 1 N/Closed Relay: Tamper; RF Loss; Low Battery.
END OF LINE RESISTANCE	N/A
POWER INPUT	2 x CR123, 3 volt batteries*
PULSE COUNT	1 - 2
HOUSING & IP RATING	High Impact ABS IP65
BS8418 COMPLAINT	Yes

*Batteries not included

BEAM PATTERNS

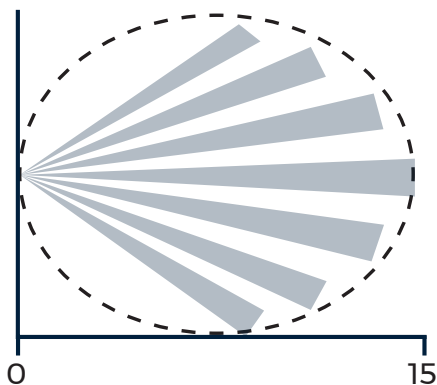

BEAM PATTERNS SET TO MAXIMUM RANGE

