


This HDMI Splitter 1x2 uses a single HDMI source, accessing to multiple HDMI sinks. The splitter allows one HDMI device to be split easily to two HDMI compatible monitors or projectors. The splitter can also be placed at the end of a long HDMI cable to regenerate the HDMI signal. The HDMI Resolution up to 3840x2160/30Hz.

- Supports HDMI 1.4b
- Supports Full 3D
- Supports HDMI resolution up to 3840x2160/30Hz
- Supports the max band rate of 3.4G and max bandwidth of 340Mhz
- Supports deep color 8/10/12bit
- Supports input up to 10metres AWG26 HDMI standard cable length, output up to 15metres AWG26 HDMI standard cable length
- Displaying single source, multi-output high-definition signal source from DVD player A / V receiver, set-top box
- 5V / 1A power adapter
- Full Copper cat 5 is to be used at all times to ensure Continuity of HDMI Signal

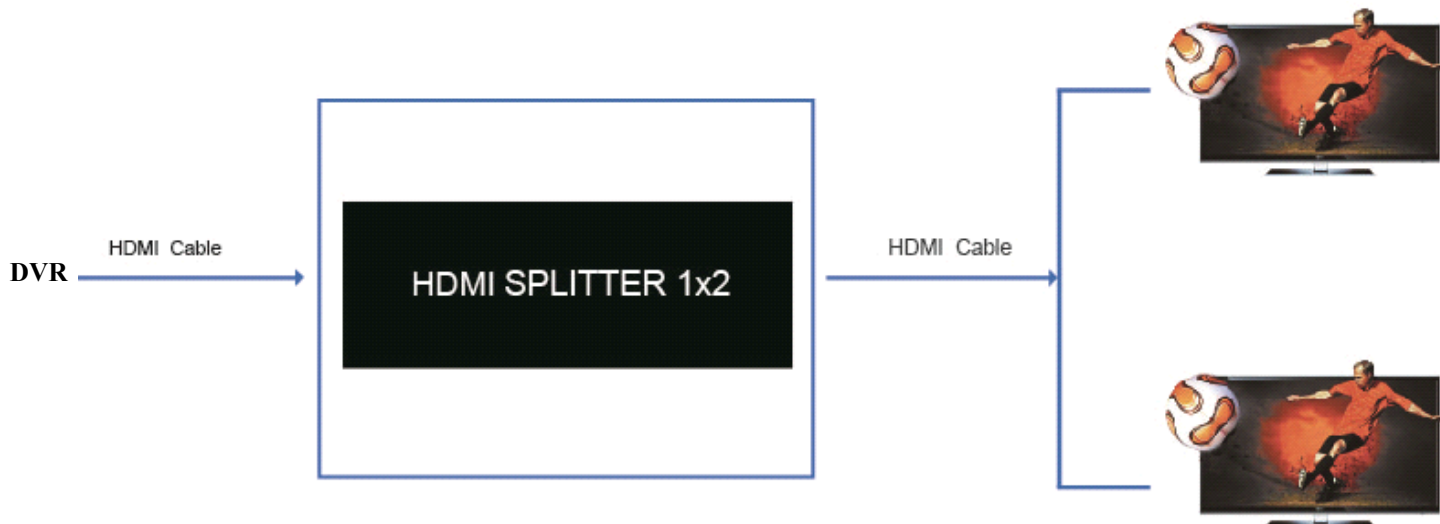

HDMI version	HDMI 1.4b
HDMI resolution	UP TO 3840*2160/30Hz
Support video color format	8/ 10/12bit deep color
Support audio format	DTS-HD/Dolby-trueHD/DTS/Dolby-AC3/DSD
Max bandwidth	225MHz
Max baud rate	2.25Gbps
Input cable distance	<=10m AWG26 HDMI standard cable
Output cable distance	<=15m AWG26 HDMI standard cable
HDMI input	1 HDMI
HDMI output	2 HDMI
Max working current	500mA
Specifications of power adapter	Input:AC (50HZ, 60HZ) 100V-240V;output: DC5V/1A
Operating Temperature range Connecting operation	(-15 to +55 )
Operating Humidity range	5 to 90%RH (No Condensation)
Dimension (L x W x H)	105x50x20mm
Weight	120g

1. Connect 1 HDMI cable from HDMI source devices into HDMI Splitter input.
2. Connect 2 HDMI cables from displayers (monitors or projectors) into the HDMI Splitter outputs.
3. Connect 5V power supply to the HDMI 1x2 Splitter.

### Package Accessories

1. HDMI Splitter 1x2
- 2 Power Adapter
- 3 User Manual