


# HDMID04

## HDMI Video Distribution Amplifier

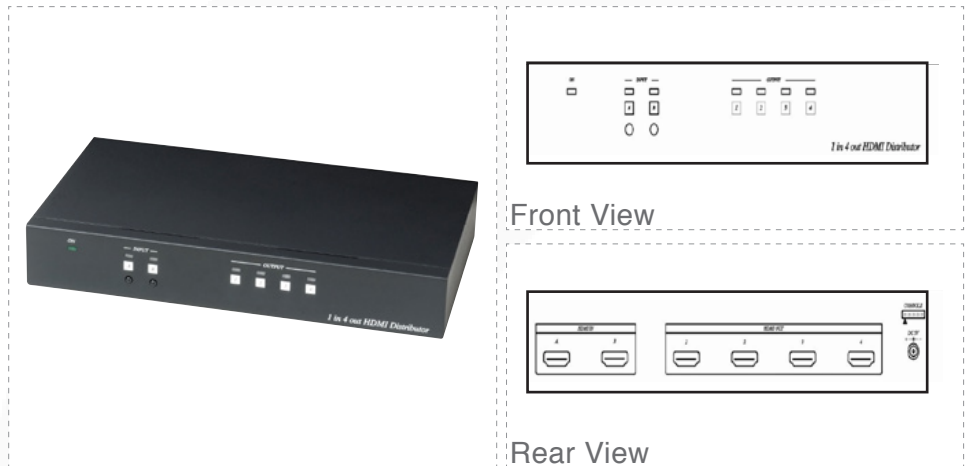

HDMID04

### Key Features

- 2x Inputs Selectable using the A/B Front Panel Buttons
- Connects up to 2x HDMI Displays at the Same Time from Digital Video Sources
- The A/B Inputs can be setup as Auto Jump (Auto Detects Input Signal), or Manual Setting
- Supports High Resolution: 480i, 480p, 720p, 1080i, 1080p @24/50/60Hz
- Bandwidth: 25-225MHz, Supports up to 12-Bit Deep Colour
- Supports DTS-HD, Dolby True HD, LPCM 7.1
- HDMI 1.3b, HDCP Compliant

### Technical Specification

Model Number	HDMID04
Resolution	480i/p, 720p, 1080i/p @24/50/60Hz
HDMI Connector	2x Input Port (HDMI Type A) - 4x Output Port (HDMI Type A)
A & B Inputs	2x Button Switch
Supports Bandwidth	25-225Mhz, Supports up to 12-bit Deep Colour
Supports Resolution	480i,576i,480p,720p,1080i,1080p
Power Consumption	1500mA (Max)
Power Supply	DC5V 2A
Temperature	Operation: 0 to 55°C, Storage: -20 to 85°C, Humidity: Up to 95% RH
Dimensions (L x W x H)	253 x 138.5 x 40
Weight	790g

Features and specifications are subject to change for further improvement without any notice

### Dimensions (mm)

