

IPGUARD® & BATICONNECT® INSTALLATION MANUAL IGSM4G DATA ROUTER




IGSM4G/IP router modem



Only required if 4G aerial needs to go on roof, max 80 metres from IPGUARD (usually in top floor riser), ZAN1055 external aerial and AR122 PSU included.





IPGUARD
Smart app



24/7/365
www.baticonnect.com

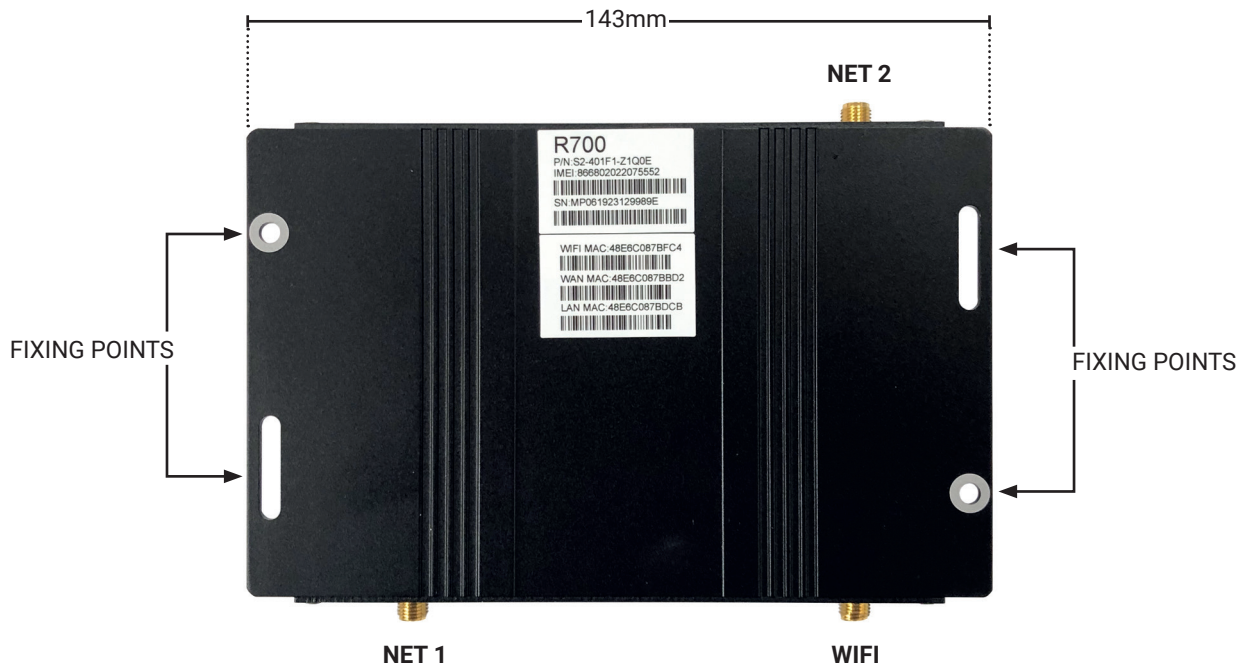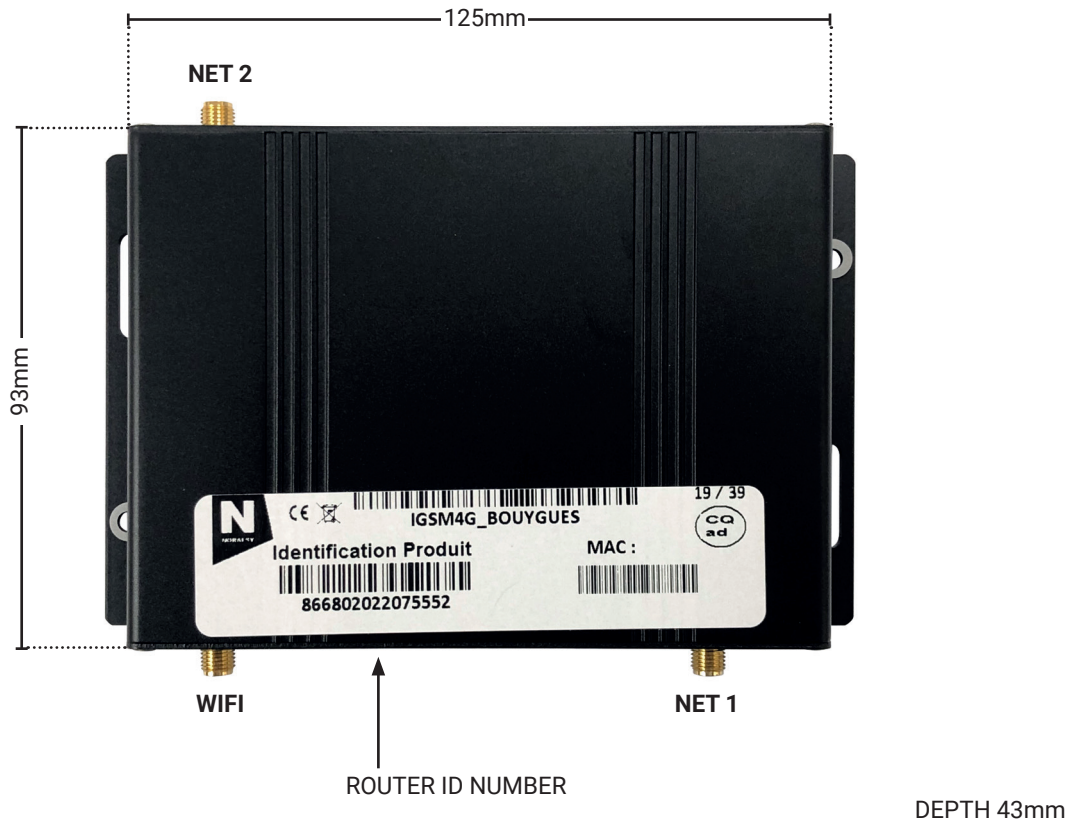

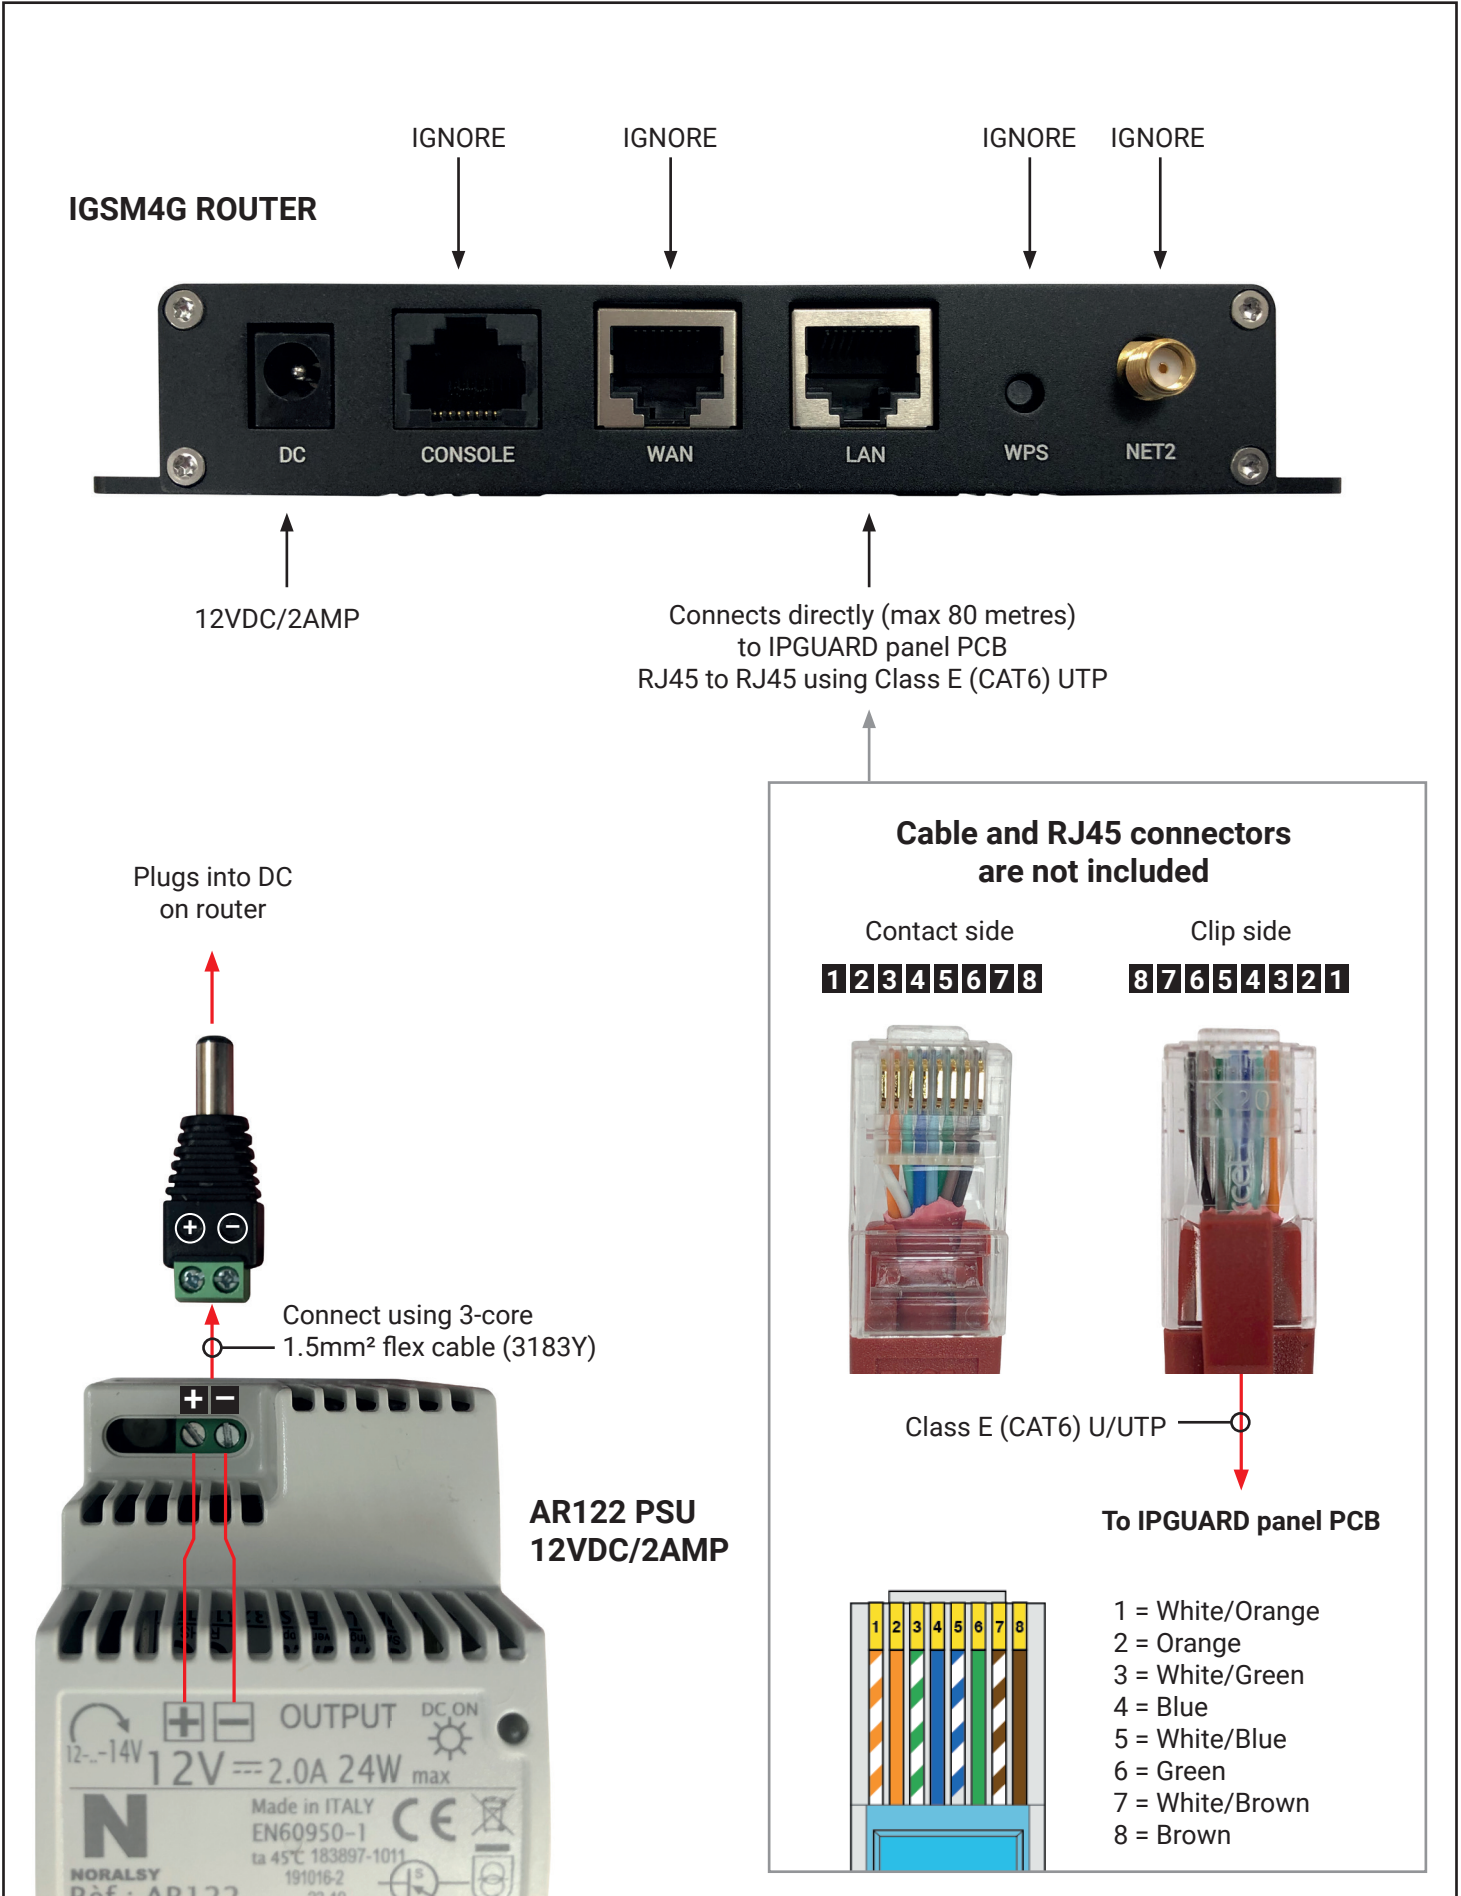

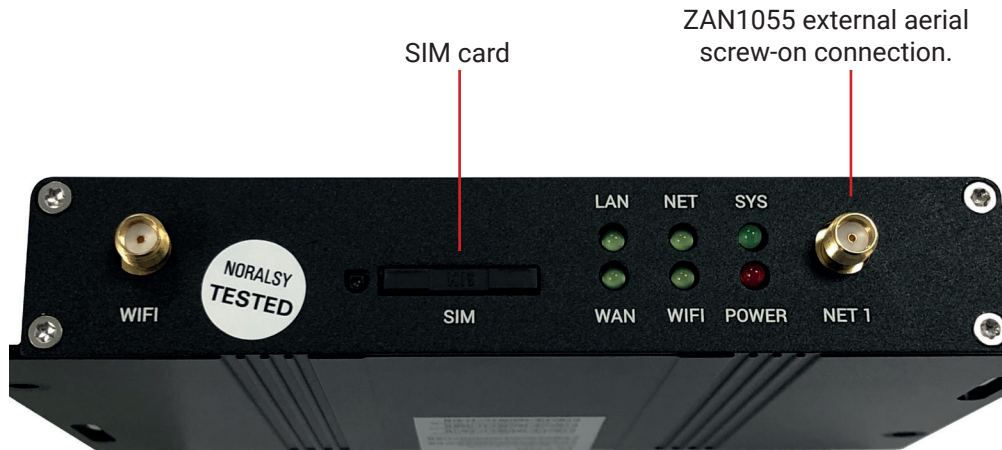


ZAN1055

Connects to NET 1. Always required if 4G signal to IGSM4G Router is low but obviously recommended to get best signal available.



Internal screw-on aerial connects to NET 1


Only these LED's are relevant indicators for IPGUARD remote router operation.

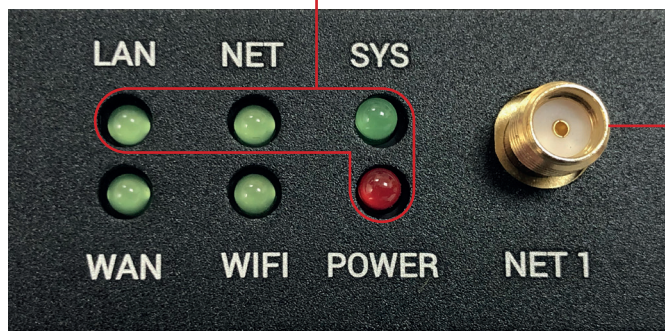

ZAN1055 external aerial screw-on connection.

Note. The IGSM4G must be fitted in a dry and weather protected location.


**Bracket, aerial and RG58
coaxial cable (5 metres) included**

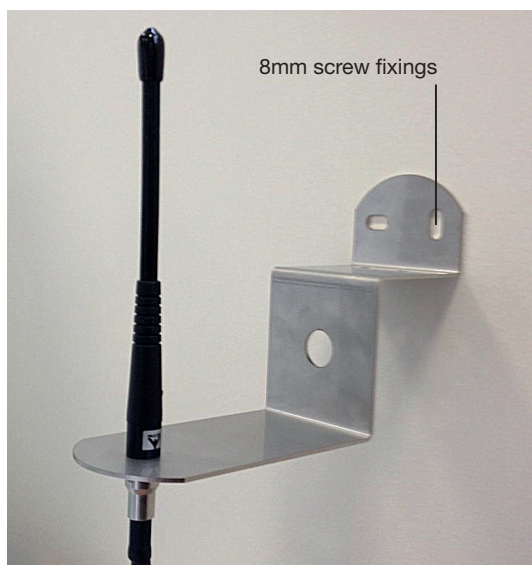

**IP DOOR
ENTRY**

08000 156496
sales@ipdooreentry.co.uk
www.ipdooreentry.co.uk
f ipdooreentry

IP Door Entry Limited
Unit DC4 Prologis Park
Eastman Way
Hemel Hempstead
HP2 7DU



24/7/365
www.baticonnect.com