




**IX0104CO**

**SWITCH FRONT PLATE, 4 BUTTONS+HOLE 40X40MM**

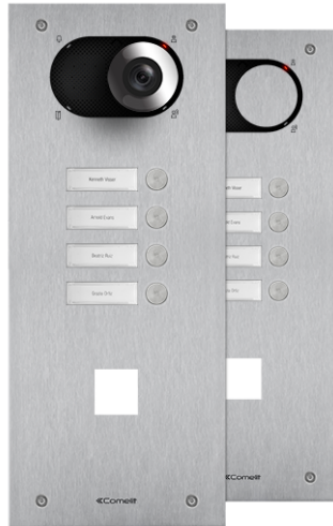

Front plate for Switch entrance panel in 2.5 mm thick brushed AISI 316 stainless steel, designed to house SimpleKey or third-party access control readers. Adapter art. 1250U (supplied) offers the option of using the audio or audio/video module (not supplied), depending on the type of wiring applied (Simplebus digital 2-wire or ViP). Complete with 4 pre-fitted, pre-wired buttons. White LED nameplate backlighting. IK08 protection rating. To be finished with flush-mounted box or surface-mounted casing. Panel dimensions: (L x H): 150x369.1 mm. Hole dimensions: 40x40 mm.

**AWARDS**

DESIGN  
MILANO



**IX0104CO**

**SWITCH FRONT PLATE, 4 BUTTONS+HOLE 40X40MM**

**GENERAL DATA**

|               |                                 |
|---------------|---------------------------------|
| Type          | Monoblock                       |
| Height (mm)   | 369.1                           |
| Width (mm)    | 150                             |
| Depth (mm)    | 2.5                             |
| Product color | Steel                           |
| Flush-mounted | Yes, with a dedicated accessory |
| Wall-mounted  | Yes, with a dedicated accessory |

**COMPATIBLE SYSTEMS**

|   |  |
|---|--|
| Compatible audio and audio/video units                    | Art.1682, Art.1682HVC, Art.4682HD, Art.1621, Art.1622, Art.1622VC, Art.4680C, Art.4681 |
| Audio/video Simplebus 2 with power supply art. 4888C      | Yes  |
| Audio/video Simplebus 2 with power supply art. 1210/1210A | Yes  |
| Simplebus 2 audio/video kit with power supply art. 1209   | Yes  |
| Audio Simplebus 2 with power supply art. 1210/1210A       | Yes  |
| Audio Simplebus 1   | Yes  |
| ViP   | Yes  |

**HARDWARE FEATURES**

|                             |              |
|-----------------------------|--------------|
| Call type                   | Push-buttons |
| Type of buttons             | Mechanical   |
| Number of push-buttons (n°) | 4            |
| Backlight colour            | White        |

**ENVIRONMENTAL AND COMPLIANCE FEATURES**

|                                   |      |
|-----------------------------------|------|
| IP protection rating              | IP54 |
| Vandal Resistant rating (IK code) | IK08 |



**IX0104CO**

**SWITCH FRONT PLATE, 4 BUTTONS+HOLE 40X40MM**

**ENVIRONMENTAL AND COMPLIANCE FEATURES**

|                                 |          |
|---------------------------------|----------|
| Operating temperature (°C)      | -25 ÷ 55 |
| Operating humidity (RH max) (%) | 25 ÷ 95  |
| Environmental class             | III      |



**IX0104CO**

## **SWITCH FRONT PLATE, 4 BUTTONS+HOLE 40X40MM**

### **ACCESSORIES**



**IX9161 HOUSING FOR FRONT PLATE W/ 5-6-7-8 BUTTONS**

Surface-mounted casing for entrance panels art. IX0105, IX0106, IX0107 and IX0108 with 5-6-7-8 buttons.



**IX9151 FLUSH-MOUNTED BOX FOR FRONT PLATE W/ 5-6-7-8 BUTT.**

Flush-mounted box for entrance panels art. IX0105, IX0106, IX0107 and IX0108 with 5-6-7-8 buttons. Dimensions: 124x343.1x56 mm.